P/N 126910-01
Rev. B, 03/2017

GWMS2 WALL MOUNTED SWITCH KIT

[FOR USE WITH APPLIANCE MODELS MISSION36/42, CIS BV, GAMMA26, BLAZE-N-GLOW, TRIFLAME, MAGNIFLAME, MULTI-SIDED27, DUAL-FLAME, MONTEBELLO, SHERIDAN, RIOLIGHTS, VRT4032/36, VCT4032/36, VCM3026, CIS VF, MNF24/30/36, GLOW RAMP, TRIPLEFLAME, MULTI-SIDED, VF18/24, DUALBURNER, SINGLEBURNER, AVALON18/24, FMLR18/24, FB18/24/30, FA18/24/30, FDLCR18/24/30, FSLR18/24, OXFORD18/24, AMHERST18/24, BERKSHIRE18/24, MENDOCINO18/24, SONOMA18/24, CHELSEA21, CONCORD26, WESTERLY32, BILTMORE18/24/30, WILMINGTON18/24/30, BEARRIVER18/24/30L, SOMERSET27, NEWCASTLE]

KIT CONTENTS

1 ea. Switch
1 ea. Switch Cover
2 ea. Mounting Screws
25 ft. Wire
1 ea. Instruction Sheet



Cat. No.	Model	Description
F0245	GWMS2	On/Off Wall Switch

REQUIRED TOOLS AND SUPPLIES

Flat Blade Screwdriver

GENERAL INFORMATION

For Use With IHP Manufactured Remote-Ready Log Sets, Cast Iron Stoves or Fireplace Systems. This kit allows the gas log heater to be turned on and off with a wall switch.

READ ALL THE STEPS BEFORE STARTING THE INSTALLATION

THE APPLIANCE MUST BE OFF AND COLD BEFORE BEGINNING.

ALL WARNINGS, PRECAUTIONS AND INSTRUCTIONS IN THE INSTALLATION AND OPERATION MANUAL PROVIDED WITH THE APPLIANCE APPLY TO THESE INSTRUCTIONS.

If you encounter any problems, need clarification of these instructions or are not qualified to properly install this kit, contact you local distributor or dealer.

If any of these parts are missing or damaged, contact your dealer or IHP.us.com for referral information.

⚠ WARNING

Do not connect this switch or log set to an electrical source! Electrical shock and/or fire hazard will occur.

INSTALLATION AND CONNECTION INSTRUCTIONS

***NOTE**: Remove factory installed jumper wire (if installed). Jumper wire is connected to TP/TH and TH terminals if applicable.*

1. Connect one wire terminal to the “TH” terminal and the other wire terminal to the ''THTP''on the control valve *(see **Figure 1**).*
2. Route the 25 ft. wire to a convenient location.
   IMPORTANT: The wire may be shortened but must not be lengthened.
3. Connect both bare wire ends to each of the terminals of the provided wall switch.
4. Install the wall switch and cover in the wall.

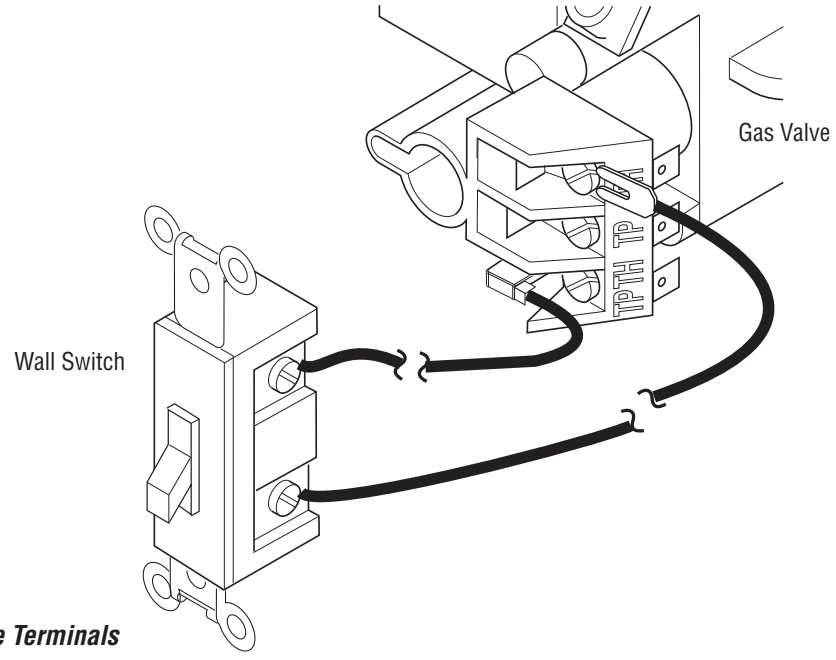


Figure 1 - Connecting Wire Terminals

IHP reserves the right to make changes at any time, without notice, in design, materials, specifications, prices and also to discontinue colors, styles and products. Consult your local distributor for fireplace code information.

Printed in U.S.A. © 2014 Innovative Hearth Products
P/N 126910-01 Rev. B 03/2017

IHP
1508 Elm Hill Pike, Suite 108 • Nashville, TN 37210