

MLDVT-35 *shown with standard black interior.*

True louverless design with striking fire presentation, delivers style and ambiance while helping reduce energy costs.

LENNOX®
HEARTH PRODUCTS

MERIT® SERIES



MLDVT-40 *shown with Buff Rustic ceramic brick refractory liner.*

■ The Merit® Series louverless direct-vent (MLDVT) gas fireplaces deliver the clean, elegant presentation of a true louverless design. Inside, the highly efficient fireplaces produces tall, dramatic flames and a warm ember glow at a very low BTU/hr rate, reducing fuel consumption and costs without sacrificing fire quality. To complement, the MLDVT boasts an expansive glass viewing area that offers a front-row seat to the cozy entertainment. Available in four sizes, the luxury and style of a louverless fireplace makes the MLDVT an efficient and affordable option. ■

STANDARD FEATURES

Striking fire presentation at a very low BTU/hr rate saves energy costs without sacrificing quality.

Louverless design delivers a clean, traditional masonry look that is quick and easy to install.

Expansive viewing area presents the fire in the most dramatic and impressive way.

Highly detailed logs replicate the natural appearance of delicately placed wood.

Wrought iron grate.

Flex gas line connector with shut-off valve.

Choose from Millivolt or energy saving battery backed up intermittent pilot ignition. All models have hi/lo flame and heat control and will work during a power outage.

Available in 30", 35", 40" and 45" sizes.

Uses Secure Vent® rigid and Secure Flex® direct-vent systems to considerably reduce installation time and costs.

OPTIONAL ACCESSORIES

❶ Fixed-screen panels.***

❷ Ceramic brick liners in Buff Rustic, Red Rustic and Buff Herringbone.

❸ Stye view door.


❹ Choice of remotes and wall mounted controls.

Blower kits—including variable speed control version.

***Provide a barrier to prevent direct contact with hot glass surface.



Beautifully detailed logs, dramatic fire presentation and Red Rustic brick liner on 40" and 45" models

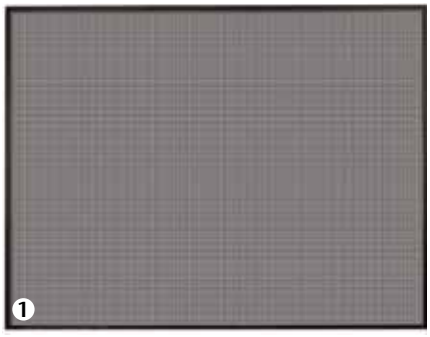

❶ *Screen panel kit*




Buff Herringbone



Buff Rustic



❷ *Red Rustic*

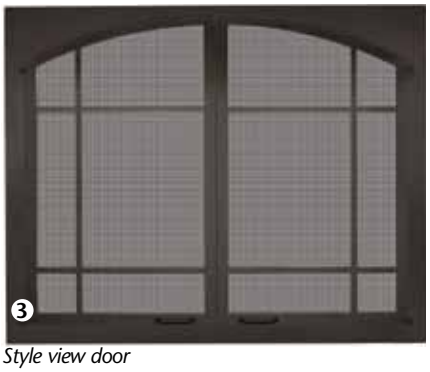

❸ *Style view door*



❹ *Deluxe and standard remote controls*



Thermostat Wall Controls

GAS FIREPLACE EFFICIENCIES

MODEL	BTU/INPUT/HR	CANADIAN ENERGUIDE RATING*	AFUE**
MLDVT-30	9,000–13,500	NG-51% / LP-54%	NG-57% / LP-61%
MLDVT-35	11,400–16,000	NG-59% / LP-61%	NG-59% / LP-61%
MLDVT-40	14,000–20,000	NG-61% / LP-61%	NG-62% / LP-61%
MLDVT-45	17,000–23,000	NG-59% / LP-61%	NG-64% / LP-64%

*Intermittent ignition systems.
**Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.

DIMENSIONS



MLDVT30



MLDVT35




MLDVT40




MLDVT45


GAS FIREPLACE SPECIFICATIONS

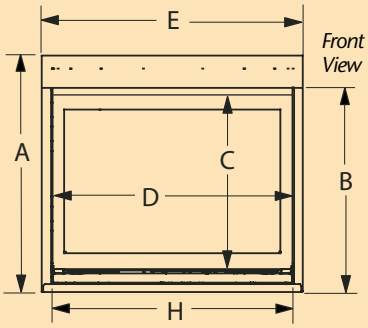

Front View

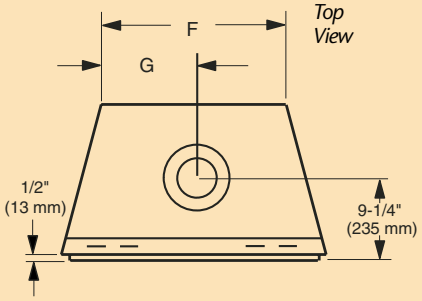

Top View

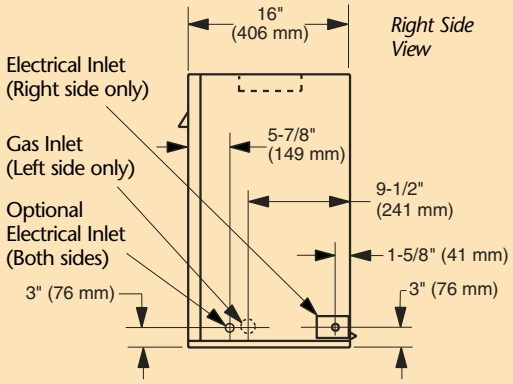

Right Side View


Typical Installation

FRAMING DIMENSIONS

	WIDTH	HEIGHT	DEPTH
MLDVT-30	30-1/4" (768 mm)	35-1/4" (895 mm)	16" (406 mm)
MLDVT-35	35-1/4" (895 mm)	35-1/4" (895 mm)	16" (406 mm)
MLDVT-40	40-1/4" (1022 mm)	40-1/4" (1022 mm)	16" (406 mm)
MLDVT-45	45-1/4" (1149 mm)	40-1/4" (1022 mm)	16" (406 mm)

DIMENSIONS

	MLDVT-30	MLDVT-35	MLDVT-40	MLDVT-45
A	32-1/4" (819 mm)	32-1/4" (819 mm)	37-1/4" (946 mm)	37-1/4" (946 mm)
B	28-1/8" (715 mm)	28-1/8" (715 mm)	33-1/8" (841 mm)	33-1/8" (841 mm)
C	23-1/4" (587 mm)	23-1/4" (587 mm)	28-1/4" (714 mm)	28-1/4" (714 mm)
D	27" (686 mm)	32" (813 mm)	37" (940 mm)	42" (1067 mm)
E	30-1/4" (768 mm)	35-1/4" (895 mm)	40-1/4" (1022 mm)	45-1/4" (1149 mm)
F	20" (508 mm)	25" (635 mm)	30" (762 mm)	35" (889 mm)
G	10" (354 mm)	12-1/2" (317 mm)	15" (381 mm)	17-1/2" (445 mm)
H	28" (711 mm)	33" (838 mm)	38" (965 mm)	43" (1092 mm)

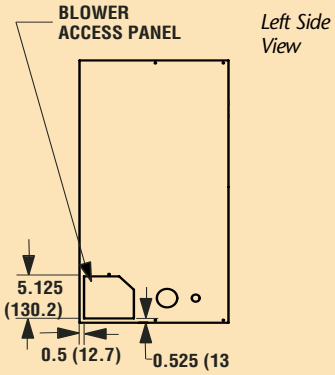

Left Side View

PRODUCTS AND DEALERS YOU CAN COUNT ON

Lennox is committed to providing you with the finest hearth products available. Choosing the right dealer for your hearth needs is as important as choosing the right brand, and our dealers are a big reason why you can count on quality customer service when you call.

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

Approved and listed to U.S. and Canadian safety and performance standards – ANSI Z21.88/CSA 2.33 and CAN/CGA 2.17M91.

LENNOX®

HEARTH PRODUCTS

Canada

ENERGUIDE

Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P.4.1-02

Intertek

Report Number:
100326540PRT-001

100% recycled

© Innovative Hearth Products LLC 2013

www.lennoxhearthproducts.com

785268M-A 03/13