

MONTEBELLO ST

DIRECT VENT GAS FIREPLACES



astria
FIREPLACES®



*FEATURED Montebello See Through shown with
Black Reflective Porcelain Liners, Aged Oak Log Set, and Light Tinted Outdoor Kit*

The **Montebello See Through** Direct Vent Gas Fireplace presents a traditional design with expansive ceramic glass opening for a true masonry appearance. With its flush hearth floor design, dramatic flame presentation along with industry leading heating performance, the Montebello ST provides multiple possibilities for making your living area warm and inviting.

STANDARD FEATURES

- ◆ Available in a 40" See Through model-configurable as indoor/indoor or indoor/outdoor applications
- ◆ Gas controls are conveniently hidden to the side of the fireplace opening for easy installation and finishing
- ◆ Electronic ignition with battery backup to provide continued operation in the event of a power outage
- ◆ Six flame settings with up to a 33% turn-down for precise heat control
- ◆ Smooth-faced design features ceramic glass for optimum heat transfer and a protective screen*
- ◆ Beautifully crafted aged oak high density fiber log set with heavy duty grate
- ◆ Interior liner selections consists of two-piece black reflective porcelain or ceramic fiber available in a variety of colors and patterns
- ◆ Full function remote control (T-stat, flame, IPI/CPI)
- ◆ Optional outdoor window kit, tested and listed to ASTM commercial window standard for air infiltration, water resistance, structural integrity and thermal resistance (U-Value/CRF)
- ◆ Limited Lifetime Warranty

*All applicable models comply with ANSI Z21.50/88 barrier requirements.



FEATURED Aged Oak high density fiber log set with heavy duty grate

Required Options (Choose One)

INTERIOR

Choose from six, realistic fireplace liners that deliver the true look of artisanal craftsmanship.



Black Reflective Porcelain Liner



Buff Rustic Stacked Ceramic Fiber Liner



Black Rustic Ceramic Fiber Liner



Buff Herringbone Ceramic Fiber Liner



Architectural Stone Ceramic Fiber Liner



Venetian Tile Ceramic Fiber Liner

Outdoor kit Options

(One required for indoor/outdoor application)



Light Tinted



Dark Tinted


Total Comfort Control Remote (Included)

All Montebello ST models come complete with a multi-function remote that gives you convenient control of all the built-in features.

- Manual On-Off & Thermostatic Modes
- 6 Flame Heights Settings
- Weekday/Weekend Modes



FLAT WALL FRAMING SPECIFICATIONS

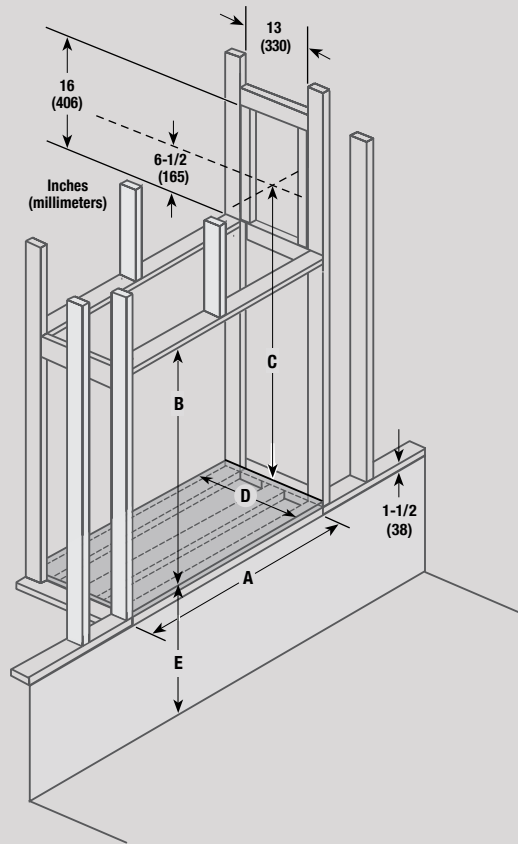

MONTEBELLO ST

A	52-1/16"
B	47-5/16"
C	75-1/2"
D	26-5/16"
E	6" (Pedestal for outdoor applications only)

*FRONT COVER Montebello See Through shown with
Black Reflective Porcelain liners and Aged Oak Log Set*

IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.


Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

astria
FIREPLACES®

© 2026 Innovative Hearth Products
785619M 09/26

Visit us online
Astria.us.com

APPLIANCE SPECIFICATIONS

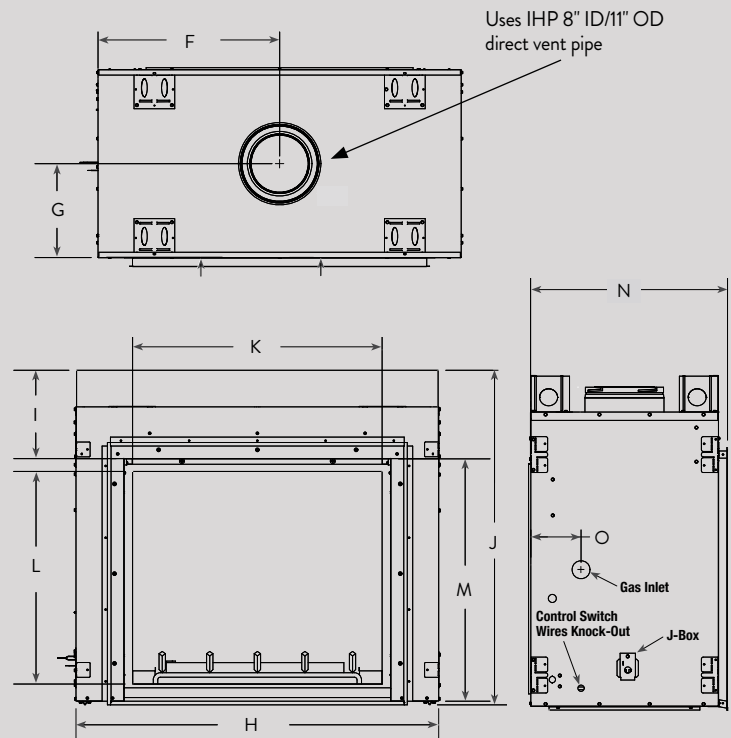

MONTEBELLO ST

F	25-9/32"
G	13-3/32"
H	50-1/2"
I	12-5/16"
J	46-19/32"
K	34-3/4"
L	29-19/32"
M	33-3/4"
N	27-7/16"
O	7"

FIREPLACE EFFICIENCIES – Listed to ANSI Z21.88 as a gas fireplace heater.

MODEL	FUEL	BTU/HR	AFUE**	P4/ENERGUIDE*
MONTEBELLO ST	NG	57,000-37,000	60.9%	59.9%
MONTEBELLO ST	LP	50,000-40,000	59.8%	55.1%

*Intermittent ignition systems

**Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.

PFS
C US
Report #F14-107

