


DRT40PF


DIRECT-VENT FIREPLACES

Framing Dimensions

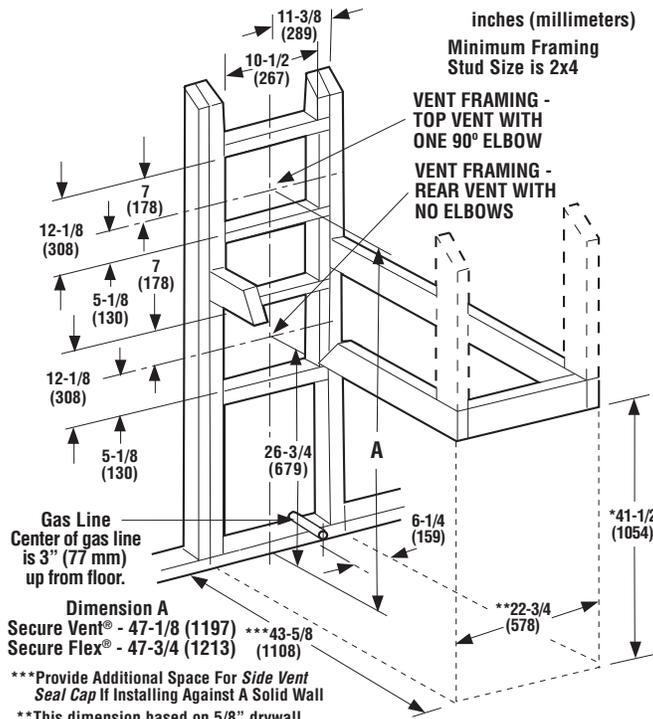

inches (millimeters)
Minimum Framing Stud Size is 2x4

VENT FRAMING - TOP VENT WITH ONE 90° ELBOW
VENT FRAMING - REAR VENT WITH NO ELBOWS

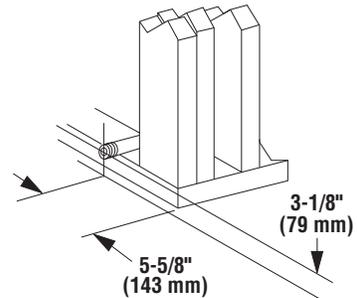

Route a 1/2" (13 mm) gas line to the right side of the appliance as shown


Dimension A
Secure Vent® - 47-1/8 (1197) ***43-5/8
Secure Flex® - 47-3/4 (1213) (1108)

***Provide Additional Space For Side Vent Seal Cap If Installing Against A Solid Wall


**This dimension based on 5/8" drywall. For 1/2" drywall use 23".

*This dimension can be reduced to 41" (1042 mm). This results in 0" (0 mm) clearance between framing and unit framing spacers. (The 41-1/2" dimension permits easier fireplace installation, if unit is installed after framing is erected).


Fireplace Dimensions

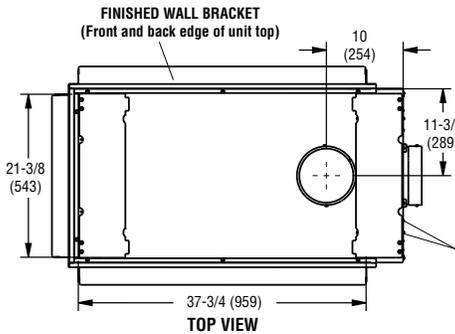


NOTE: Unit has a factory-installed vent seal cap and vent cover plate in each flue outlet. The vent seal cap is not shown in this figure.

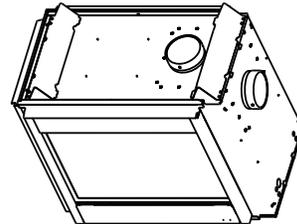

DETAIL OF FINISH WALL BRACKET

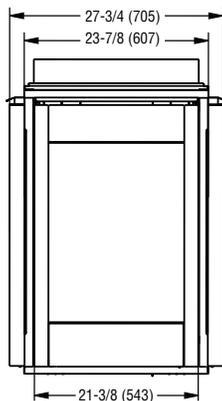


LEFT SIDE VIEW

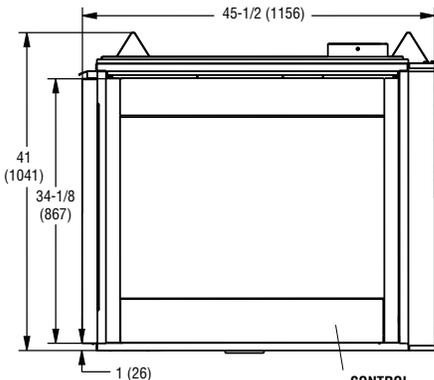

FRONT VIEW

CONTROL COMPARTMENT ACCESS PANEL

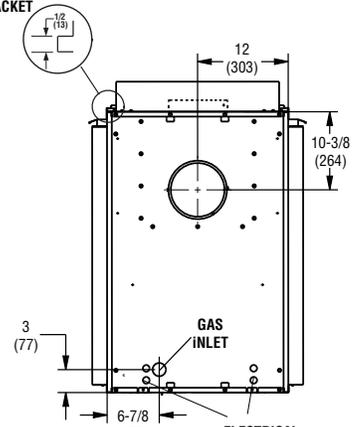

RIGHT SIDE VIEW

NOTE: DIAGRAMS & ILLUSTRATIONS NOT TO SCALE.

Inches (millimeters)

DRT40PF

Product Info

Product Reference Information			
Cat. No.	Model	Shipping Weight	Shipping Volume
F2273	DRT40PFDMN	300 lbs.	42 cu.ft.
F2274	DRT40PFDMP	300 lbs.	42 cu.ft.
F2275	DRT40PFDEN	300 lbs.	42 cu.ft.

Listing




Report No. 14-171

These appliances comply with National Safety Standards and are tested and listed by PFS to ANSI Z21.88 (in Canada, CSA-2.33), and CAN/CGA-2.17-M91, latest editions, in both USA and Canada, as vented gas fireplace heaters.



Shelf Height

Model	Combustible Shelf Height - Inches (millimeters)			
	Rear Vent - Straight Out the Back		Top Vent - with One 90° Elbow	
	Secure Vent®	Secure Flex®	Secure Vent	Secure Flex
DRT40PF	41-1/8 (1045)	41-1/8 (1045)	53-7/8 (1368)	55-5/8 (1413)

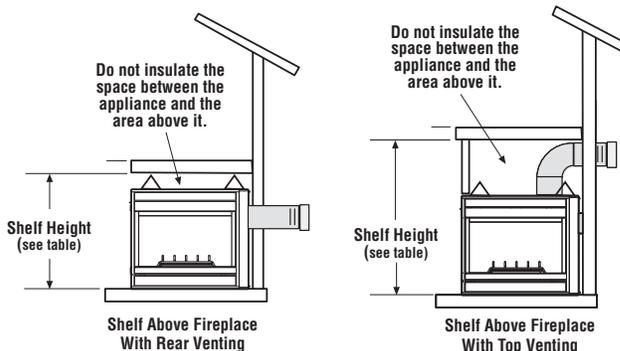



Clearances

Minimum Clearances Inches (millimeters)	
Back & Sides	1/2 (13) 0 (0) from Spacers or Dimples
Top Spacers	0 (0)
Floor	0 (0)
From Bottom of Unit To Ceiling	64 (1626)
Vent	3 (77) Top* / 1 (26) Sides & Bottom
Service Clearances - Feet (meters)	
Front, Back & Sides	3 feet (0.9 meters)

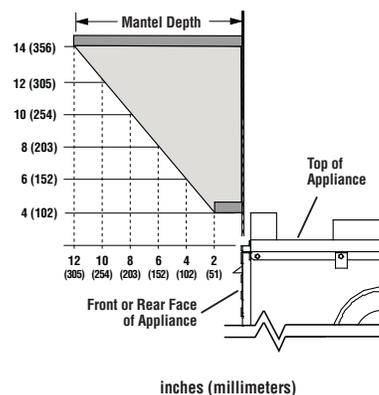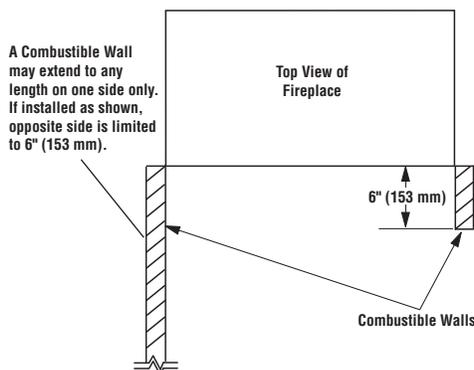


*NOTE: 3" (77 mm) above any horizontal/ inclined vent component.

Venting

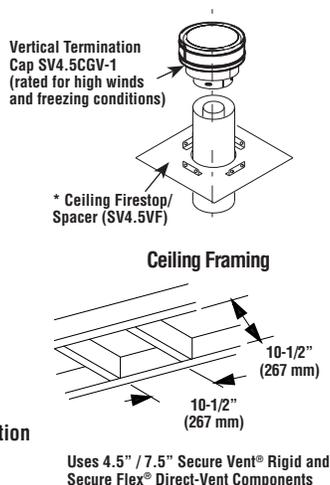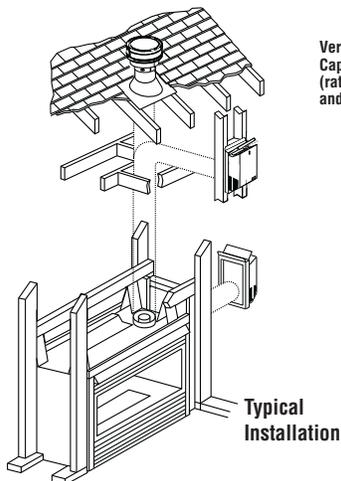

Square Horizontal Termination (SV4.5HT-2)

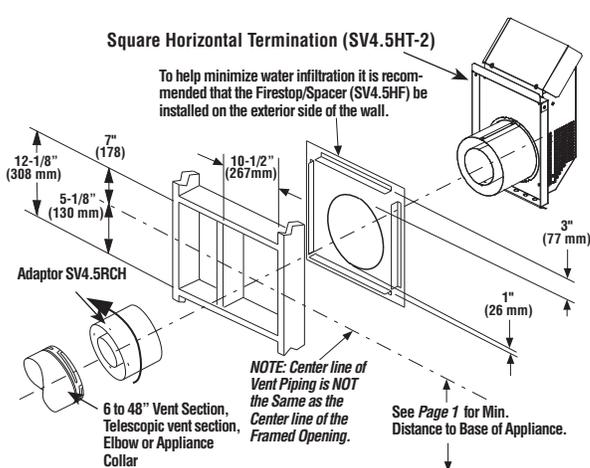

NOTE: DIAGRAMS & ILLUSTRATIONS NOT TO SCALE.