



WRE4536 SERIES

OUTDOOR WOOD-BURNING FIREPLACES

Framing Dimensions


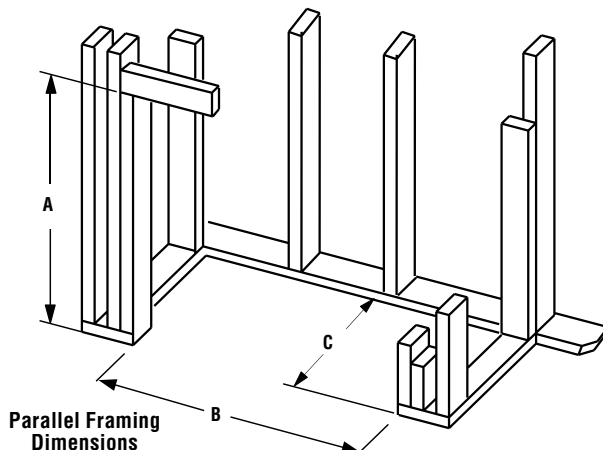


	A	B	C
36" Models	67-1/8 (1705)	45-5/8 (1159)	28-1/4 (718)


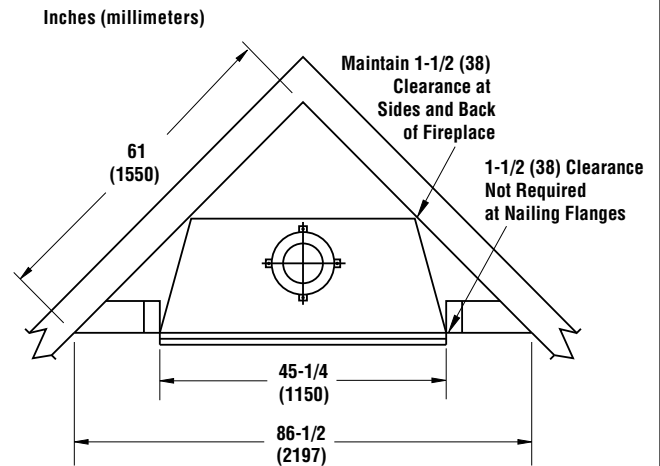


Corner Framing Dimensions

Inches (millimeters)

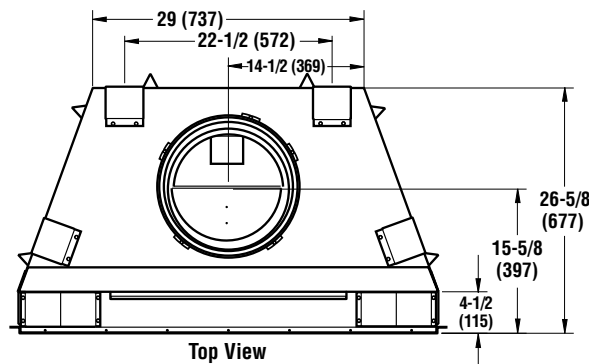

Fireplace Dimensions

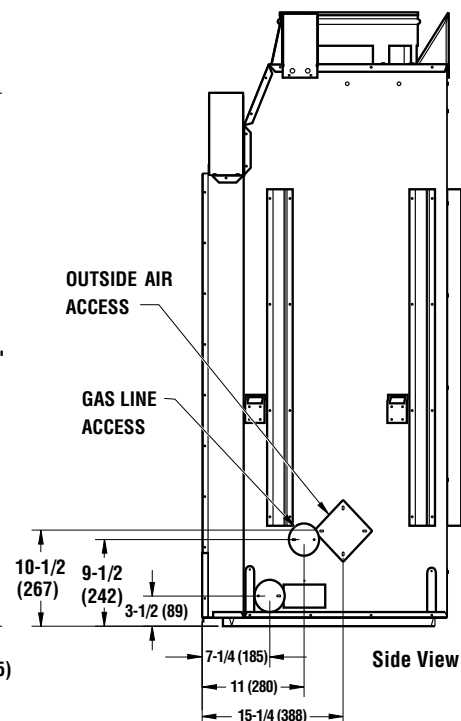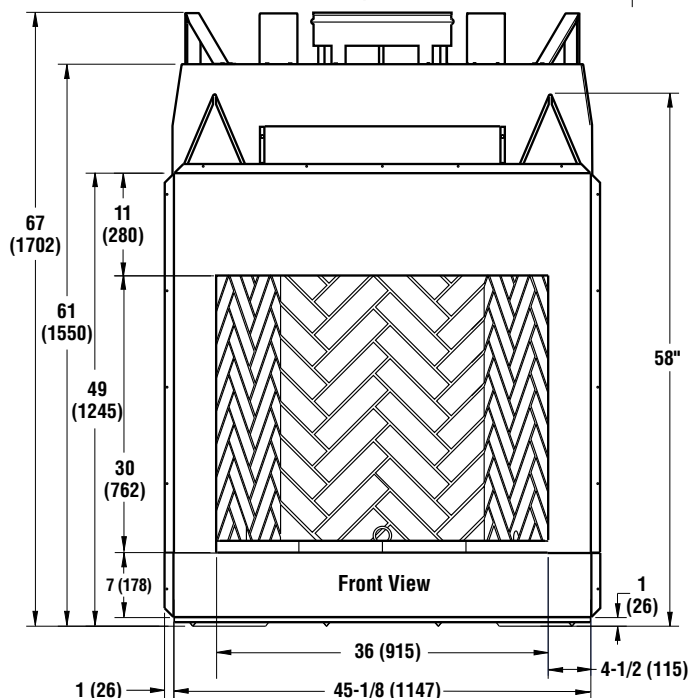

WRE4536 SERIES

Product Information

Product Reference Information			
Cat. No.	Model	Shipping Weight	Shipping Volume
F0437	WRE4536RS	520 lb.	131.5 cu. ft.
F0438	WRE4536WS	520 lb.	131.5 cu. ft.
F0439	WRE4536RH	520 lb.	131.5 cu. ft.
F0440	WRE4536WH	520 lb.	131.5 cu. ft.

Listing Information



Report No. F09-095


This fireplace has been tested and approved by PFS Corporation under UL127/ULC-S610 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.60, Z21.84 or Z21.11.2 standards.

Clearances

Clearances to Combustibles	
Description	Min. Clearance
Back and sides of fireplace	1-1/2 (38)*
Ceiling	42 (1067)
Front of fireplace	48 (1220)
Floor	0 (0)**
Perpendicular wall to opening	12 (305)
Top spacers	0 (0)
Chimney outer pipe surface	2 (51)


* Not required at nailing flanges

** See step 2 of Framing in the Installation and Operation Manual

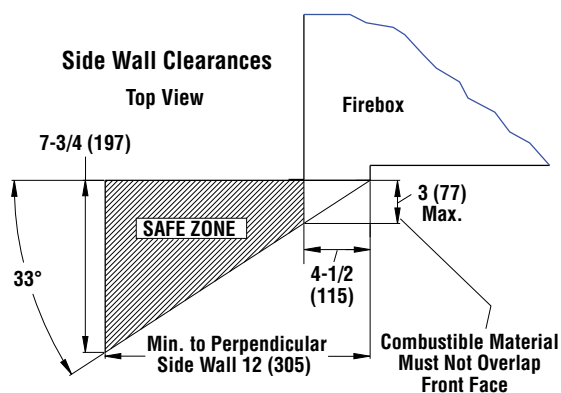

NOTE: REFER TO PRODUCT INSTRUCTION MANUAL FOR INSTALLATION REQUIREMENTS, SPECIFICATIONS AND CLEARANCES.

Mantel Clearances

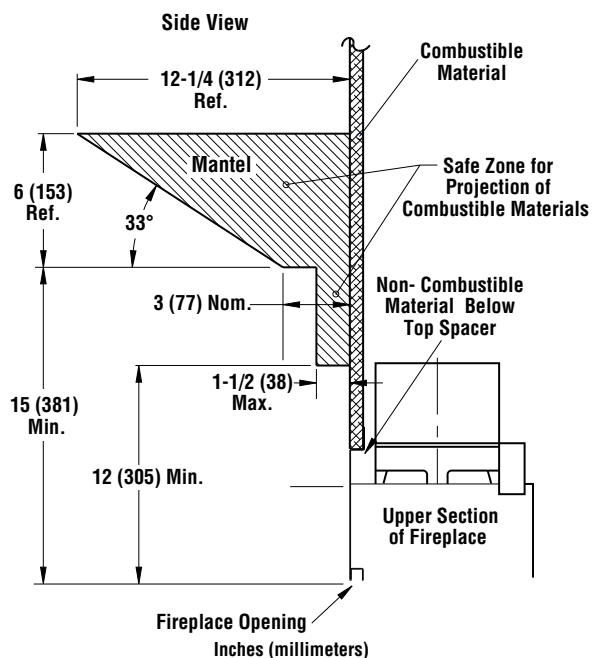

Venting

Venting
Uses Standard Wood Burning Chimney (12DM)

