



WRE4542 SERIES

OUTDOOR WOOD-BURNING FIREPLACES

Framing Dimensions




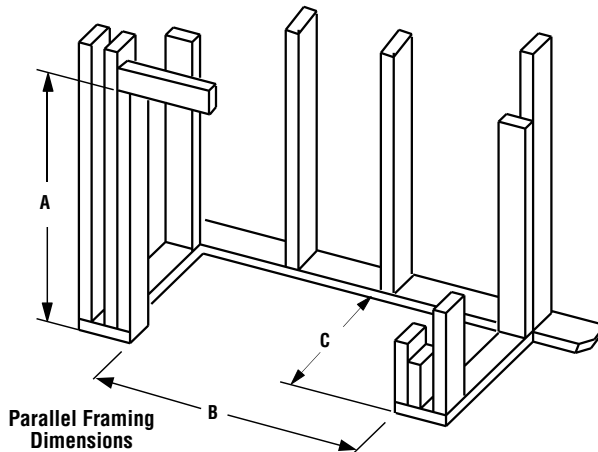


	A	B	C
42" Models	67-1/8 (1705)	51-5/8 (1312)	30-1/8 (766)

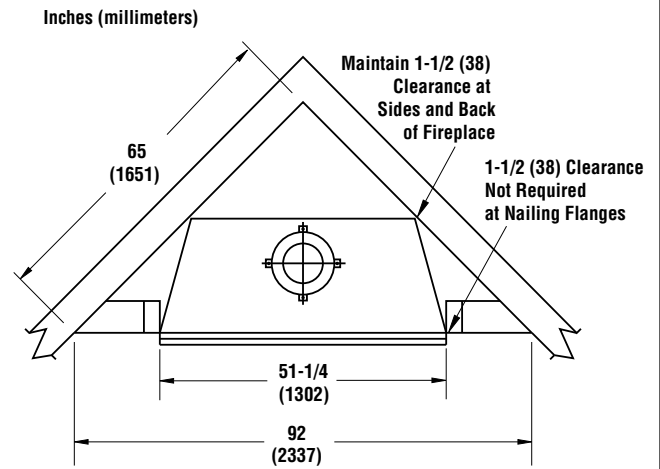

Fireplace Dimensions

Inches (millimeters)

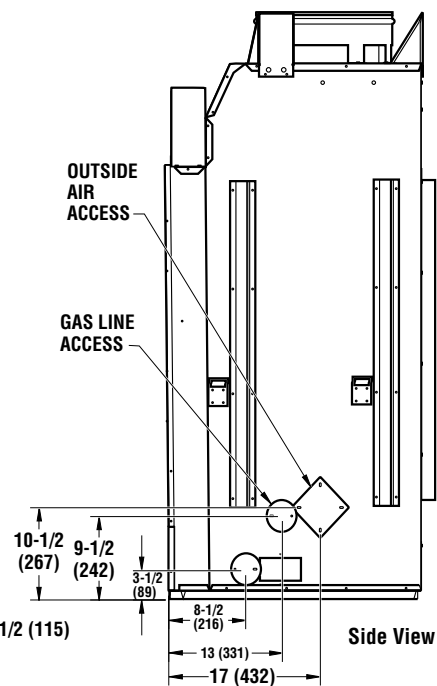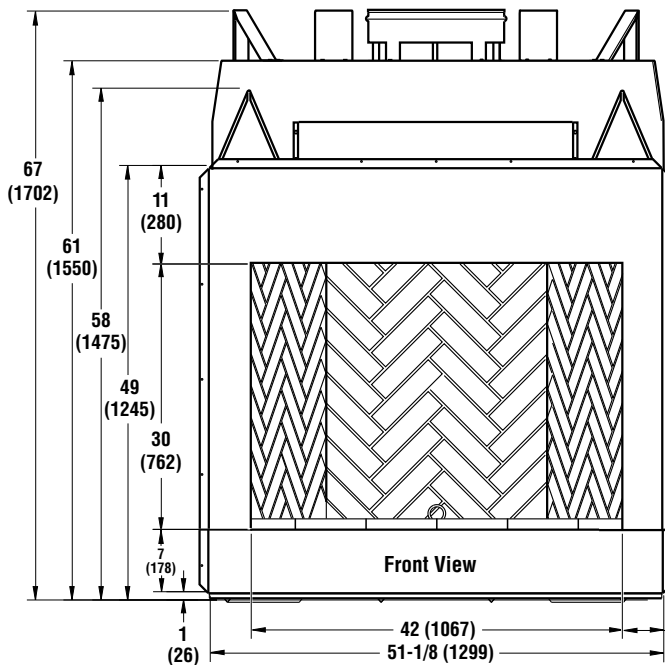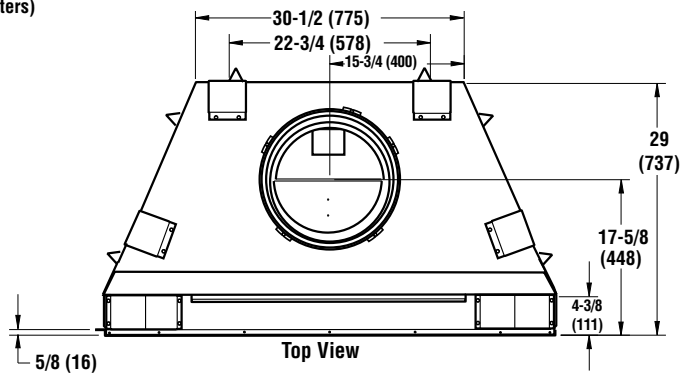

WRE4542 SERIES

Product Information

Product Reference Information			
Cat. No.	Models	Shipping Weight	Shipping Volume
F0441	WRE4542RS	572 lb.	131.5 cu. ft.
F0442	WRE4542WS	572 lb.	131.5 cu. ft.
F0443	WRE4542RH	572 lb.	131.5 cu. ft.
F0444	WRE4542WH	572 lb.	131.5 cu. ft.

Listing Information



Report No. F09-095


This fireplace has been tested and approved by PFS Corporation under UL127/ULC-S610 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.60, Z21.84 or Z21.11.2 standards.

Clearances

Clearances to Combustibles	
Description	Min. Clearance
Back and sides of fireplace	1-1/2 (38)*
Ceiling	42 (1067)
Front of fireplace	48 (1220)
Floor	0 (0)**
Perpendicular wall to opening	18 (457)
Top spacers	0 (0)
Chimney outer pipe surface	2 (51)


* Not required at nailing flanges

** See step 2 of Framing in the Installation and Operation Manual

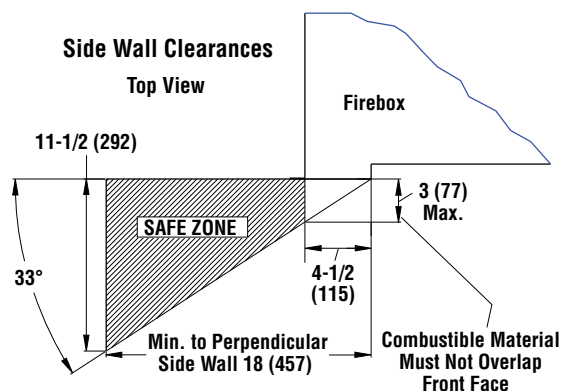

NOTE: REFER TO PRODUCT INSTRUCTION MANUAL FOR INSTALLATION REQUIREMENTS, SPECIFICATIONS, AND CLEARANCES.

Mantel Clearances

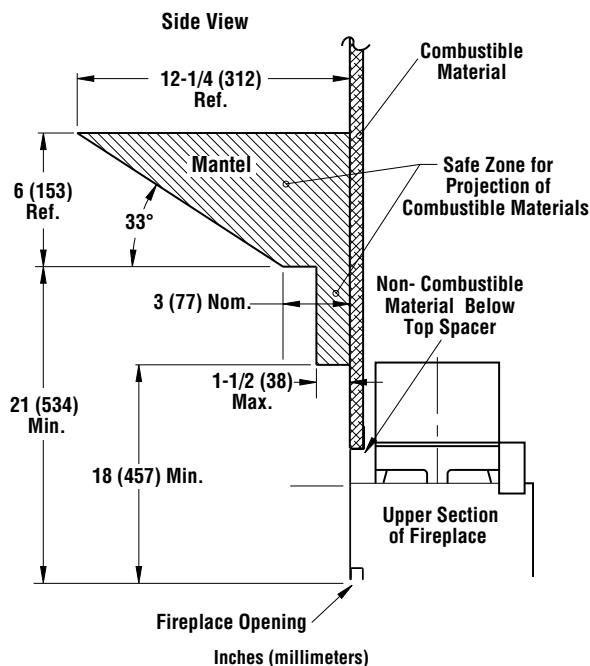

Venting

Venting

Uses Standard (12DM) and Hi-Temp (12HT) Wood-Burning Chimney. For Canada Use 12HT Chimney

