



Allume 60 with Black Reflective Glass Liner and Reflective Black Crushed Glass


## STANDARD FEATURES

- ◆ Available in 60", 72", and 84" linear configured models
- ◆ See through conversion kit available to allow viewing from two living spaces
- ◆ HeatFlo™ kit option directs heat above heat sensitive wall hangings
- ◆ Electronic ignition with battery backup provides continued operation in the event of a power outage
- ◆ Clean-face design with integrated tile stops for easy finishing
- ◆ Ceramic glass for optimum heat transfer and a protective screen\*
- ◆ Black painted interior standard with multiple glass liner options available
- ◆ Reflective black crushed glass media included with several optional colors available to customize the look
- ◆ Wireless wall-mounted control provides variable flame settings
- ◆ Optional variable speed blower available to fine tune your heating needs\*\*
- ◆ Limited Lifetime Warranty


\*All applicable models comply with ANSI Z21.50/88 barrier requirements.

\*\* Blower use is not compatible with a see-through application.

## LINERS



Black Painted (Standard)




Black Reflective



White Reflective


## MEDIA




Refl. Black Crushed Glass (Standard)



Platinum Crushed Glass



Refl. Blue Crushed Glass



Onyx Ice Rock



Diamond Ice Rock



Sapphire Blue Ice Rock



River Rock Assorted Set



High-Definition Driftwood Log Set


## CONTROL OPTIONS




- Wireless Wall-Mounted Control (Standard)
- Multi-Function Touch Remote (Optional)
- Hand-Held On/Off High/Low Remote Control (Optional)

# APPLIANCE SPECIFICATIONS

# FLAT WALL FRAMING SPECIFICATIONS

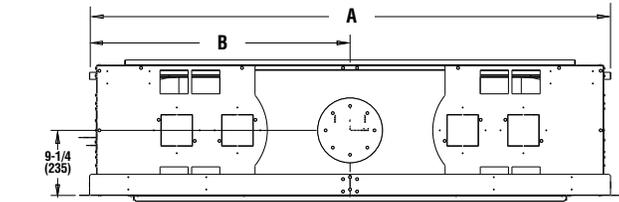


TOP VIEW

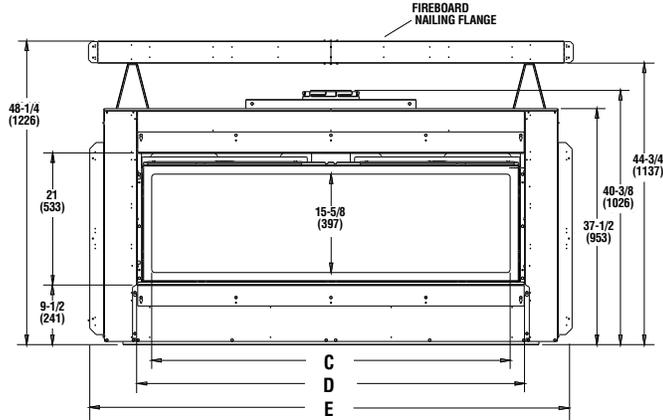

FRONT VIEW

**ALLUME DIMENSIONS**

Models	A	B	C	D	E
60"	74"	37"	56-5/8"	61-1/2"	76-5/8"
72"	86"	43"	68-5/8"	73-1/2"	88-5/8"
84"	98"	49"	80-5/8"	85-1/2"	100-5/8"

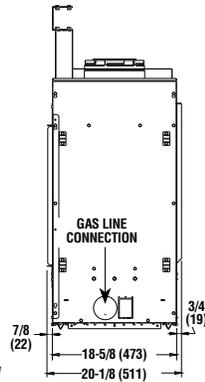

RIGHT SIDE VIEW


Refer to Installation Manual for all required clearances to combustibles.

**FIREPLACE BTU OPERATING RANGE**


MODEL	FUEL	BTU/HR	AFUE	P4
<b>ALLUME 60-B</b>	NG	40,000-28,000	52.6	55.1
<b>ALLUME 60-B</b>	LP	40,000-30,000	52.6	54.0
<b>ALLUME 72</b>	NG	45,000-31,500	55.0	57.0
<b>ALLUME 72</b>	LP	43,000-32,250	55.0	57.8
<b>ALLUME 84</b>	NG	50,000-35,000	51.1	55.4
<b>ALLUME 84</b>	LP	47,000-35,250	56.7	63.1

**IMPORTANT NOTES:**

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer. Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location. Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

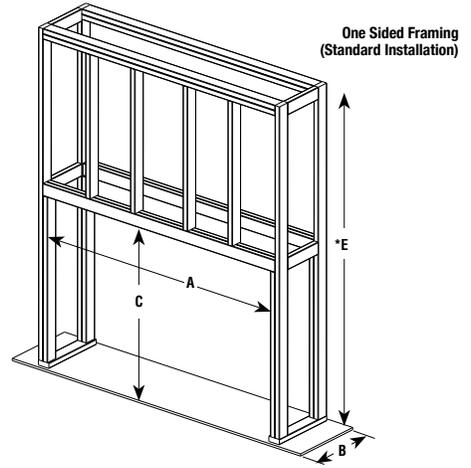

One Sided Framing (Standard Installation)

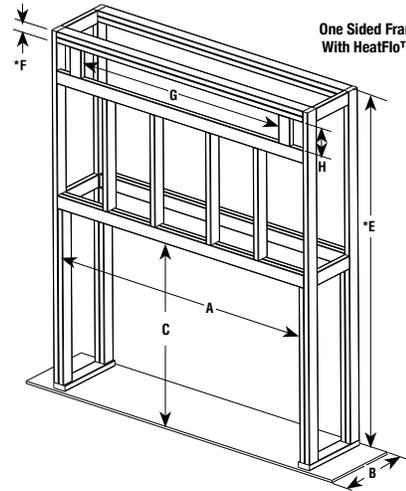

One Sided Framing With HeatFlo™ Kit

**ALLUME FRAMING DIMENSIONS**

Models	A	B	C	E	F	G	H
60" One Sided Framing	74-1/4"	19-1/2"	48-1/2"	84"	—	—	—
60" One Sided Framing HeatFlo™ Kit	74-1/4"	19-1/2"	48-1/2"	84"	3"	62"	7-1/2"
72" One Sided Framing	86-1/4"	19-1/2"	48-1/2"	84"	—	—	—
72" One Sided Framing HeatFlo™ Kit	86-1/4"	19-1/2"	48-1/2"	84"	3"	78"	7-1/2"
84" One Sided Framing	98-1/4"	19-1/2"	48-1/2"	84"	—	—	—
84" One Sided Framing HeatFlo™ Kit	98-1/4"	19-1/2"	48-1/2"	84"	3"	90"	7-1/2"

E. MINIMUM HEIGHT FROM APPLIANCE BASE TO CEILING

F. MINIMUM OPENING DISTANCE FROM CEILING TO ALLOW FOR MIN DISTANCE FROM HEATFLO REGISTER TO CEILING OF 6"

Refer to Spec Sheet for complete see-through applications and instructions.



© 2021 Innovative Hearth Products  
785748M 11/21

Visit us online  
Astria.us.com

