

COMPASS / COMPASS DLX

LINEAR DIRECT VENT GAS FIREPLACES



COMPASS DLX

*Compass DLX 55 with
Platinum Crushed Glass,
Optional Black Porcelain Liner,
Optional Driftwood Logs, and River Rocks*



The Compass DLX linear direct vent gas fireplace offers a modern, low profile design that is just right for contemporary and transitional spaces. Its sleek opening provides an exceptional view of the gently dancing flames while floor lighting allows you to customize the mood. The Compass DLX is a fully featured fireplace that comes complete with a heat-circulating blower and multi-function remote for the ultimate in comfort and control.

STANDARD FEATURES

- ◆ Available in a 35", 45, and 55" linear configured models
- ◆ HeatFlo™ kit option allows heat to be directed above heat sensitive wall hangings (45" & 55" models only)
- ◆ Electronic ignition with battery backup provides continued operation in the event of a power outage
- ◆ Clean-face design with integrated tile stops for easy finishing
- ◆ Decorative surrounds available to complement drywall finished applications
- ◆ Outstanding heating efficiency for increased comfort and lower operating costs
- ◆ Standard tempered glass and a protective screen*
- ◆ Black painted interior standard (optional porcelain liner available)
- ◆ Platinum crushed glass media included with several optional colors available to customize the look
- ◆ Optional driftwood logs and river rocks are a perfect addition for a transitional design
- ◆ Mood enhancing floor lighting with six distinctive settings
- ◆ Factory installed blower with six speed settings to fine tune your heating needs
- ◆ Multi-function remote included (IPI/CPI, thermostat, flame height, blower, lighting)
- ◆ Limited Lifetime Warranty


*All applicable models comply with ANSI Z21.88 barrier requirements.

Compass DLX 45 with
Platinum Crushed Glass,
Optional Black Porcelain Liner,
Optional Driftwood Logs, and
River Rocks



Standard Features (Included)

See the full set of options and accessories on page 6.



Black Painted Liner



Platinum Crushed Glass

Multi-Function Touch Remote (Included)

All DLX models come complete with a multi-function touchscreen remote that gives you convenient control of all of the built-in features.



- Touchscreen Digital Display
- Manual On-Off & Thermostatic Modes
- 3 Flame Heights Settings
- 6 Interior Light Settings
- 6 Blower Speed Settings
- Weekday/Weekend Modes
- Wall Mounted Docking Station

COMPASS



*Compass 35 with
Black Crushed Glass and
Optional Black Porcelain Liner*

The Compass linear direct vent gas fireplace offers a clean faced, low profile design that is just right for contemporary and transitional spaces. Its sleek opening provides an exceptional view of the gently dancing flames rising through the beautiful reflective black glass floor media. Reflective black porcelain interior liner, heat circulating blower, remote and wall controls are available as optional accessories, making the Compass Series a smart choice.

STANDARD FEATURES

- ◆ Available in a 35", 45", and 55" linear configured models
- ◆ HeatFlo™ kit option allows heat to be directed above heat sensitive wall hangings (45" & 55" models only)
- ◆ Electronic ignition with battery backup provides continued operation in the event of a power outage
- ◆ Clean-face design with integrated tile stops for easy finishing
- ◆ Decorative surrounds available to compliment drywall finished applications
- ◆ Outstanding heating efficiency for increased comfort and lower operating costs
- ◆ Standard tempered glass and a protective screen*
- ◆ Reflective black crushed glass media included with several optional colors available to customize the look
- ◆ Optional driftwood logs and river rocks are a perfect addition for a transitional design
- ◆ Black painted interior (optional porcelain liner available)
- ◆ Optional blower and hand-held remote controls available for all models
- ◆ Durable textured powder coat finish
- ◆ Limited lifetime warranty


*All applicable models comply with ANSI Z21.88 barrier requirements.



*Compass 55 with Black Crushed Glass,
Optional Black Porcelain Liner,
Optional Driftwood Logs, and River Rocks*

Standard Features (Included)

See full set of options and accessories on page 6.



Black Painted Liner



Reflective Black Crushed Glass

Control Options




*Thermostatic
Remote
(Optional)*



*Hand-Held
On/Off Remote
(Optional)*

Interior

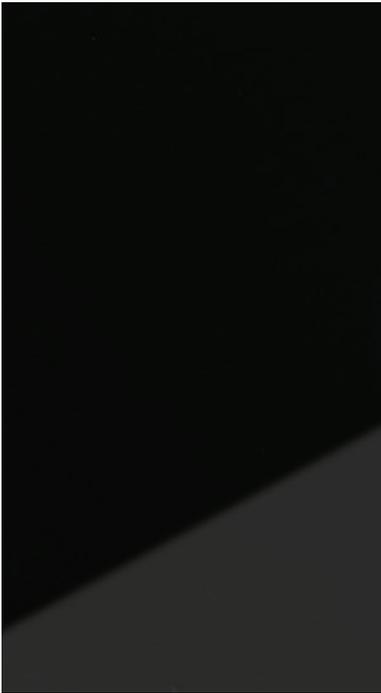

Reflective Black Porcelain Liner

Decorative Surrounds



Black Surround



Stainless Surround

Media



Reflective Black Crushed Glass



Platinum Crushed Glass



Reflective Blue Crushed Glass



High-Definition Driftwood Log Set for 55" Models



High-Definition Driftwood Log Set for 45" Models



High-Definition Driftwood Log Set for 35" Models



River Rock Assorted Set



Compass 55" shown with installed HeatFlo™ Kit


HeatFlo™ Kit

Protect heat sensitive televisions, artwork and other decorative wall materials. No blower required, the HeatFlo™ kit works through natural convection to redirect heat from the fireplace upward through hidden ductwork and out through a sleek horizontal vent. Walls stay cooler and heat flows more evenly through the room for a comfortable fireplace experience.

- TV & Artwork can be placed above the fireplace
- Helps protect heat sensitive wall facing materials
- Improves convective heat circulation in the room
- No electricity or blower required for operation



APPLIANCE SPECIFICATIONS

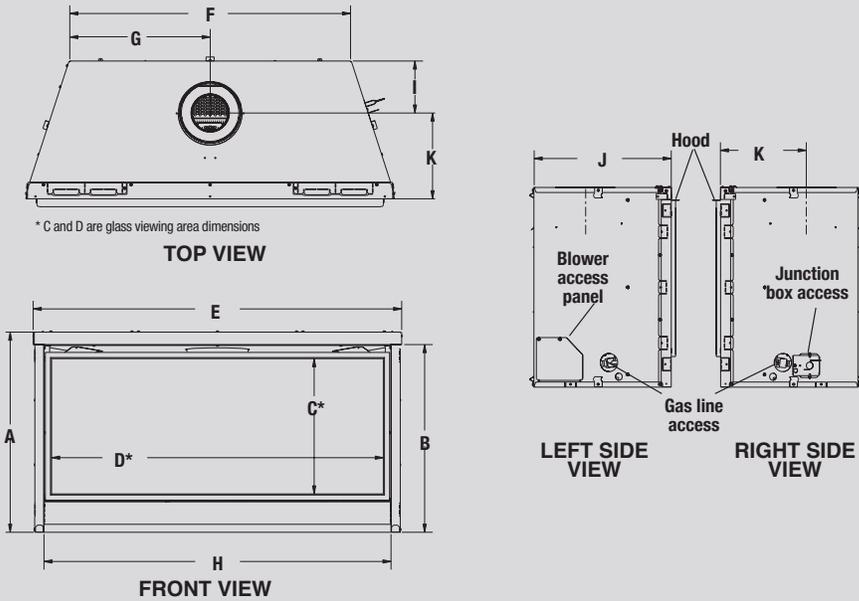

COMPASS DLX / COMPASS

MODEL	A	B	C	D	E	F	G	H	I	J	K
35" MODELS	24-3/4"	23-1/4"	16-3/4"	30"	35-1/2"	24-3/4"	12-3/8"	32-7/8"	6-1/2"	17"	10-5/8"
45" MODELS	24-3/4"	23-1/4"	16-3/4"	40"	45-1/2"	34-3/4"	17-3/8"	42-7/8"	6-1/2"	17"	10-5/8"
55" MODELS	24-3/4"	23-1/4"	16-3/4"	50"	55-1/2"	44-3/4"	22-3/8"	52-7/8"	6-1/2"	17"	10-5/8"

Refer to Installation Manual for all required clearances to combustibles.


FIREPLACE BTU OPERATING RANGE

MODEL	FUEL	BTU/HR	AFUE	P4
COMPASS DLX 35	NG	18,000-12,000	66.3	65.6
COMPASS DLX 35	LP	16,000-13,000	58.0	62.8
COMPASS DLX 45	NG	23,000-16,000	66.9	62.4
COMPASS DLX 45	LP	21,000-17,000	61.0	64.9
COMPASS DLX 55	NG	28,000-20,000	63.0	62.7
COMPASS DLX 55	LP	27,000-21,000	60.3	63.0
COMPASS 35	NG	15,000-13,000	67.4	64.2
COMPASS 35	LP	14,000-12,000	56.4	62.4
COMPASS 45	NG	18,000-13,000	69.1	67.2
COMPASS 45	LP	16,000-13,000	56.5	62.5
COMPASS 55	NG	23,000-19,000	63.5	64.0
COMPASS 55	LP	21,000-17,000	60.2	63.1

IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer. Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location. Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

FRAMING SPECIFICATIONS

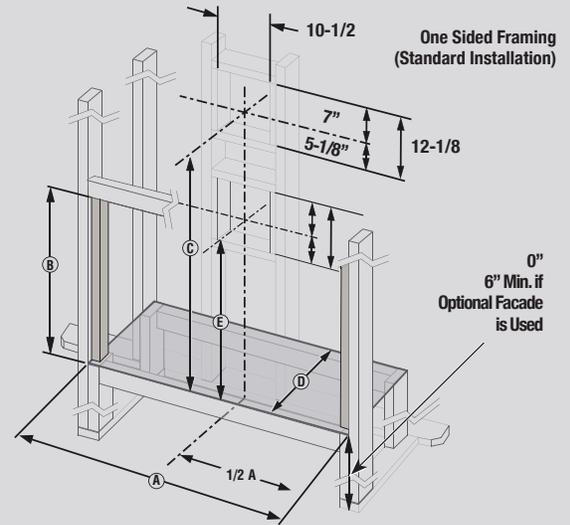

COMPASS DLX / COMPASS FRAMING

MODEL	A	B	C	D	E
35" MODELS	35-7/8"	29"	42"	18"	31-1/2"
45" MODELS	45-7/8"	29"	42"	18"	31-1/2"
55" MODELS	55-7/8"	29"	42"	18"	N/A

C = Height for installations with 12" section directly off unit then elbow
 D = for flush framing.
 E = Height for installations with elbow directly off unit (see note below)
 * Minimum opening size; additional 1/8" per side is recommended.

NOTE: Framing specifications do NOT apply for flexible venting. When using flexible venting, refer to the kit requirements for framing specifications.

NOTE: 35" & 45" model = Strongly recommend at least 1 ft of vertical rise directly off top of unit.

55" = 1 ft of vertical rise is required directly off unit.

COMPASS DLX / COMPASS HEATFLO FRAMING

	45" One Sided Framing HeatFlo Kit	55" One Sided Framing HeatFlo Kit
A	45-7/8"	55-7/8"
B	18"	18"
C	29"	29"
E	81-1/2"	81-1/2"
F	1-1/2"	1-1/2"
G	43-1/2"	53-1/2"
H	5-1/8"	5-1/8"

One Sided Framing With HeatFlo™ Kit

E = Minimum height from appliance base to ceiling
 F = Minimum opening distance from ceiling to allow for min distance from HeatFlo register to ceiling of 6"

Refer to Spec Sheet for complete see-through applications and instructions.

