

# COMPASS DLX

LINEAR DIRECT VENT GAS FIREPLACES



*Compass DLX 45 with Platinum Crushed Glass and Optional Black Porcelain Liner*

## STANDARD FEATURES

- ◆ Available in a 35", 45, and 55" linear configured models
- ◆ HeatFlo™ kit option allows heat to be directed above heat sensitive wall hangings (45" & 55" models only)
- ◆ Electronic ignition with battery backup provides continued operation in the event of a power outage
- ◆ Clean-face design with integrated tile stops for easy finishing
- ◆ Decorative surrounds available to complement drywall finished applications
- ◆ Outstanding heating efficiency for increased comfort and lower operating costs
- ◆ Standard tempered glass and a protective screen\*
- ◆ Black painted interior standard (optional porcelain liner available)
- ◆ Platinum crushed glass media included with several optional colors available to customize the look
- ◆ Optional driftwood logs and river rocks are a perfect addition for a transitional design
- ◆ Mood enhancing floor lighting with six distinctive settings
- ◆ Factory installed blower with six speed settings to fine tune your heating needs
- ◆ Multi-function remote included (IPI/CPI, thermostat, flame height, blower, lighting)
- ◆ Limited Lifetime Warranty


\*All applicable models comply with ANSI Z21.50/88 barrier requirements.

astria.us.com

## LINERS



*Black Painted (Standard)*



*Black Porcelain*

## MEDIA



*Platinum Crushed Glass (Standard)*



*Reflective Black Crushed Glass*



*Reflective Blue Crushed Glass*

## ACCESSORIES



*High-Definition Driftwood Log Set for 55" Models*



*High-Definition Driftwood Log 45" Set*



*High-Definition Driftwood Log "35" Set*



*River Rock Assorted Set*

## DECORATIVE SURROUNDS



*Black Surround*




*Stainless Surround*

## MULTI-FUNCTION TOUCH REMOTE (Included)




## APPLIANCE SPECIFICATIONS

TOP VIEW

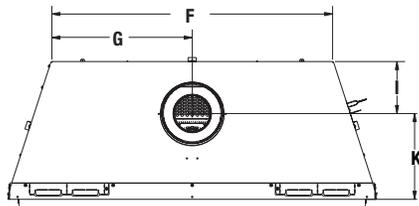


\* C and D are viewing area dimensions

FRONT VIEW

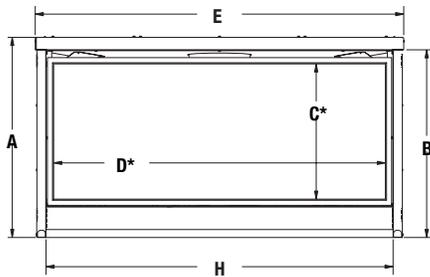

LEFT SIDE VIEW



RIGHT SIDE VIEW

COMPASS DLX

MODEL	A	B	C	D	E	F	G	H	I	J	K
35" MODELS	24-3/4"	23-1/4"	16-3/4"	30"	35-1/2"	24-3/4"	12-3/8"	32-7/8"	6-1/2"	17"	10-5/8"
45" MODELS	24-3/4"	23-1/4"	16-3/4"	40"	45-1/2"	34-3/4"	17-3/8"	42-7/8"	6-1/2"	17"	10-5/8"
55" MODELS	24-3/4"	23-1/4"	16-3/4"	50"	55-1/2"	44-3/4"	22-3/8"	52-7/8"	6-1/2"	17"	10-5/8"

Refer to Installation Manual for all required clearances to combustibles.

### FIREPLACE BTU OPERATING RANGE

MODEL	FUEL	BTU/HR	AFUE	P4
COMPASS DLX 35	NG	18,000-12,000	66.3	65.6
COMPASS DLX 35	LP	16,000-13,000	58.0	62.8
COMPASS DLX 45	NG	23,000-16,000	66.9	62.4
COMPASS DLX 45	LP	21,000-17,000	61.0	64.9
COMPASS DLX 55	NG	28,000-20,000	63.0	62.7
COMPASS DLX 55	LP	27,000-21,000	60.3	63.0

#### IMPORTANT NOTES:


As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer. Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location. Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

**astria**  
FIREPLACES®

© 2021 Innovative Hearth Products  
785766M 11/21

Visit us online  
Astria.us.com

## FLAT WALL FRAMING SPECIFICATIONS

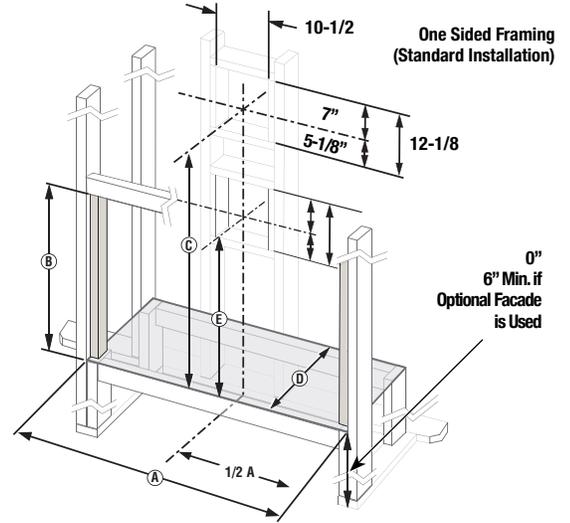

COMPASS DLX FRAMING

MODEL	A	B	C	D	E
35" MODELS	35-7/8"	29"	42"	18"	31-1/2"
45" MODELS	45-7/8"	29"	42"	18"	31-1/2"
55" MODELS	55-7/8"	29"	42"	18"	N/A

C = Height for installations with 12" section directly off unit then elbow  
D = for flush framing.

E = Height for installations with elbow directly off unit (see note below)

\* Minimum opening size; additional 1/8" per side is recommended.


NOTE: Framing specifications do NOT apply for flexible venting. When using flexible venting, refer to the kit requirements for framing specifications.

NOTE: 35" & 45" model = Strongly recommend at least 1 ft of vertical rise directly off top of unit.

55" = 1 ft of vertical rise is required directly off unit.

COMPASS DLX HEATFLO FRAMING

	45" One Sided Framing HeatFlo Kit	55" One Sided Framing HeatFlo Kit
A	45-7/8"	55-7/8"
B	18"	18"
C	29"	29"
E	81-1/2"	81-1/2"
F	1-1/2"	1-1/2"
G	43-1/2"	53-1/2"
H	5-1/8"	5-1/8"

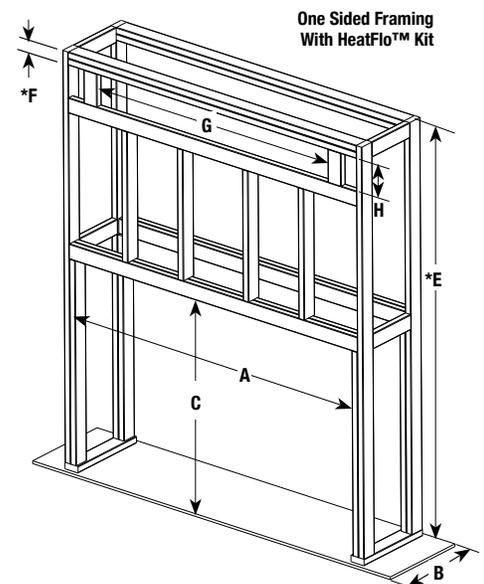

E = Minimum height from appliance base to ceiling  
F = Minimum opening distance from ceiling to allow for min distance from HeatFlo register to ceiling of 6"

Refer to Spec Sheet for complete see-through applications and instructions.

**PFS**  
C US  
Report No. F19-008

