WRT3500 SERIES wood burning fireplaces





# **STANDARD FEATURES**

- Available in 38" and 43" models
- Large smoke dome for reliable operation and unobstructed view
- Radiant smooth-faced design with durable textured powder finish
- Available with grey stacked or grey herringbone refractory panels
- Heavy duty log grate and floor with integrated ash lip
- **4** Fully insulated firebox for increased performance in colder climates
- Includes concealable mesh fire screens
- Includes adjustable outside air damper
- Optional outside air kits with flex duct and hood are available
- Uses IHP 12 DM (1700) double-wall air-cooled wood burning chimney
- Uses IHP 12 HT (2100°) heavy gauge double-wall air-cooled wood burning chimney, recommended for cold climates (required for Canada)
- 🤞 20-year limited warranty

### LINER \_\_\_\_






White Stacked

White Herringbone

# **EXTERIOR OPTIONS**





Black Bi-Fold Glass Doors

### superiorfireplaces.us.com

### **APPLIANCE SPECIFICATIONS**

FRAMING SPECIFICATIONS

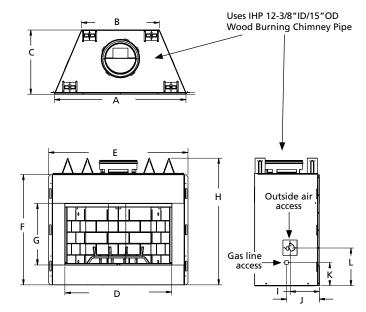




Inches (millimeters)

	WRT3538	WRT3543
А	48"	52-3/4"
В	26-3/8"	31-1/8"
с	25-3/4"	25-3/4"
D	38"	42-3/4"
E	50"	54-3/4"
F	44-1/8"	44-1/8"
G	24-5/8"	24-5/8"
н	50-3/4"	50-3/4"
I	11-5/8"	11-5/8"
J	13-1/8"	13-1/8"
к	9-1/4"	9-1/4"
L	15-1/8"	15-1/8"

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer. Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated. Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

**ON THE COVER:** WRT3538 Fireplace with Grey Stacked Refractory Liner

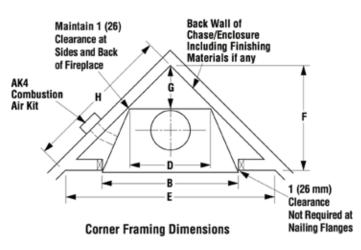

# FRAMING SPECIFICATIONS

	WRT3538	WRT3543
А	50-7/8"	50-7/8"
В	49-1/4"	54"
с	26-1/4"	26-1/4"
D	26-1/4″	31"
E	77-1/4"	82"
F	38-5/8"	41"
G	13-1/8"	15-1/2"
Н	54-5/8"	58"

us

Report #F09-171



IMPORTANT NOTES:

Visit us online SuperiorFireplaces.us.com

