

# WXS2000 SERIES

HIGH EFFICIENCY WOOD BURNING STOVES

**Superior**  
FIREPLACES®



## STANDARD FEATURES

- 🔥 Large rectangular door provides an expansive view of the burning fire.
- 🔥 Ceramic glass for extra strength and optimum heat transfer.
- 🔥 Unique, integral air wash system keeps the glass clean and clear for a wide-open view of the fire.
- 🔥 Precision-cut, heavy-gauge steel provides dependable, long-lasting operation.
- 🔥 High-density firebrick retains heat longer, resulting in increased efficiency.
- 🔥 One-touch control ensures easy operation and comfort.
- 🔥 Standard black pedestal base included.
- 🔥 Optional 150-CFM blower with Dial-A-Temp speed control.
- 🔥 EPA 2020 approved.
- 🔥 20 year limited warranty




## MODELS



WXS2021

WXS2016

# APPLIANCE SPECIFICATIONS

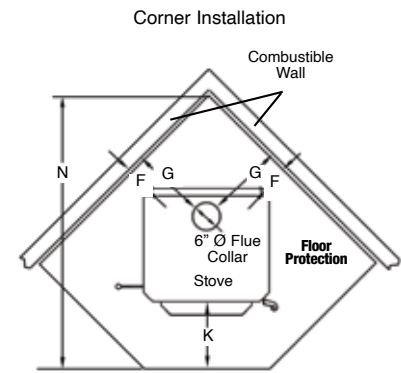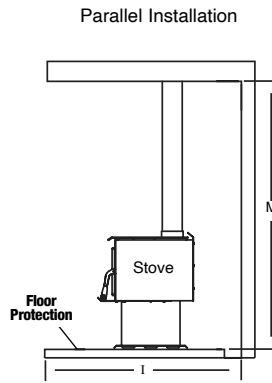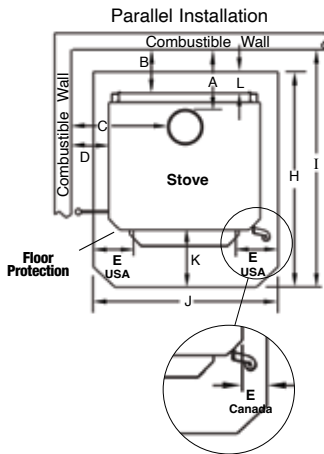

## STOVE CLEARANCES

	WXS2016				WXS2021			
	U.S. Single-Wall Connector	U.S. Double-Wall Connector	Canada Single-Wall Connector	Canada Double-Wall Connector	U.S. Single-Wall Connector	U.S. Double-Wall Connector	Canada Single-Wall Connector	Canada Double-Wall Connector
A	16"	10"	19"	13"	14-1/4"	12"	14-1/4"	12"
B	14"	8"	14"	8"	11-1/2"	9-1/8"	11-1/2"	9-1/8"
C	21"	18"	24"	21"	23"	19-1/2"	23"	19-1/2"
D	12-1/2"	9-1/2"	12-1/2"	9-1/2"	13-3/8"	9-5/8"	13-3/8"	9-5/8"
E	8"	8"	8"	8"	8"	8"	8"	8"
F	9-3/4"	5-1/2"	9-3/4"	5-1/2"	9"	6"	9"	6"
G	18"	13-1/2"	21"	16-1/2"	18"	15"	18"	15"
H	33-3/4"	33-3/4"	43-3/4"	43-3/4"	37-5/8"	37-5/8"	47-5/8"	47-5/8"
I	47-3/4"	41-3/4"	52-3/4"	46-3/4"	49"	46-3/4"	51"	48-3/4"
J	33-1/2"	33-1/2"	39-1/2"	39-1/2"	34-7/8"	34-7/8"	40-7/8"	40-7/8"
K	16"	16"	18"	18"	16"	16"	18"	18"
L	0"	0"	8"	8"	0"	0"	8"	8"
M	84"	72"	84"	72"	84"	84"	84"	84"
N	58-1/2"	52"	64-3/4"	58-1/2"	61-1/2"	57-1/2"	63-1/2"	59-1/2"

## STOVE DIMENSIONS

	WXS2016	WXS2021
WIDTH	24-3/8"	25-7/8"
HEIGHT	30-1/4"	30-3/8"
DEPTH	19-3/8"	23-3/8"
WEIGHT	280 lbs.	316 lbs.

## STOVE SPECIFICATIONS

	WXS2016	WXS2021
Max. Log Length	16"	20"
EPA Grams per Hour	2.1 gr/hr	1.6 gr/hr
Heating Capacity	700-1,400 sq. ft. *	Up to 2,000 sq. ft. *
Max. Output	55,000 BTU/hr	76,000 BTU/hr
Max. Burn Time	7-9 hours	7-9 hours

\*Square-foot heating capacities and burn times are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

### IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.



© 2026 Innovative Hearth Products

785871M 05/26

Visit us online  
SuperiorFireplaces.us.com

