

# DRL4000 ST SERIES

LINEAR DIRECT VENT FIREPLACES



## STANDARD FEATURES

- Available in 60", 72", and 84" linear configured models
- HeatFlo kit option allows heat to be directed above heat sensitive wall hangings
- Electronic ignition with battery backup provides continued operation in the event of a power outage
- Clean-face design with integrated tile stops for easy finishing
- Ceramic glass for optimum heat transfer and a protective screen\*
- Black painted interior standard with a reflective glass liner option available
- Reflective black crushed glass media included with several optional colors available to customize the look
- Optional blower and hand held multi-function remote control available
- 20-year limited warranty

\*All applicable models comply with ANSI Z21.88 barrier requirements.

## LINER



Black Porcelain Interior (Standard)



Reflective Black Glass Liner

## MEDIA



Platinum Crushed Glass (Standard)



Refl. Blue Crushed Glass



Refl. Black Crushed Glass



High-Definition Driftwood Log Sets



River Rock Assorted Set

## TRIM



Black Perimeter Trim Kit

## REMOTE




On/Off Thermostat Remote

[superiorfireplaces.us.com](http://superiorfireplaces.us.com)


# APPLIANCE SPECIFICATIONS

# FRAMING SPECIFICATIONS

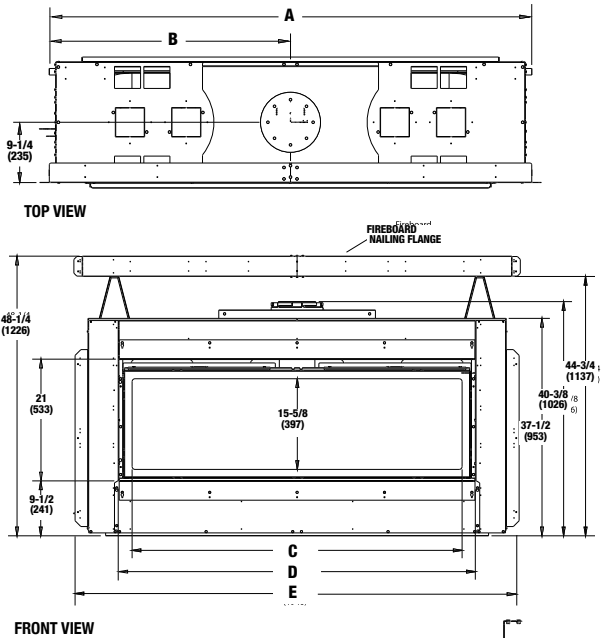

### DRL 4000 ST SERIES DIMENSIONS

Models	A	B	C	D	E
60"	74"	37"	56-5/8"	61-1/2"	76-5/8"
72"	86"	43"	68-5/8"	73-1/2"	88-5/8"
84"	98"	49"	80-5/8"	85-1/2"	100-5/8"

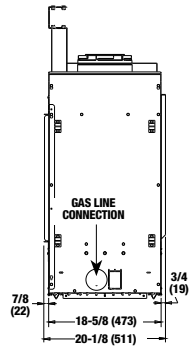

• REFER TO INSTALLATION MANUAL FOR ALL REQUIRED CLEARANCES TO COMBUSTIBLES.

### FIREPLACE BTU OPERATING RANGE

MODEL	FUEL	BTU/HR	AFUE	P4
DRL 4060-B	NG	40,000-28,000	52.6	55.1
DRL 4060-B	LP	40,000-30,000	52.6	54.0
DRL 4072	NG	45,000-31,500	55.0	57.0
DRL 4072	LP	43,000-32,250	55.0	57.8
DRL 4084	NG	50,000-35,000	51.1	55.4
DRL 4084	LP	47,000-35,250	56.7	63.1

### IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location.



Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

*On the Cover: DRL4060 fireplace with black painted interior, driftwood log set, black crushed glass media, and see-thru kit*



© 2022 Innovative Hearth Products  
785829M 03/22

Visit us online  
SuperiorFireplaces.us.com

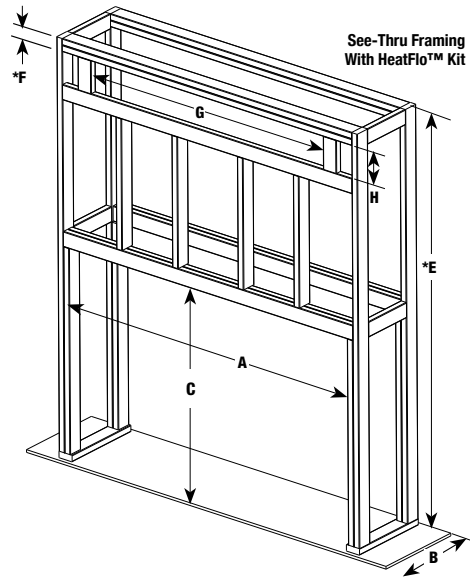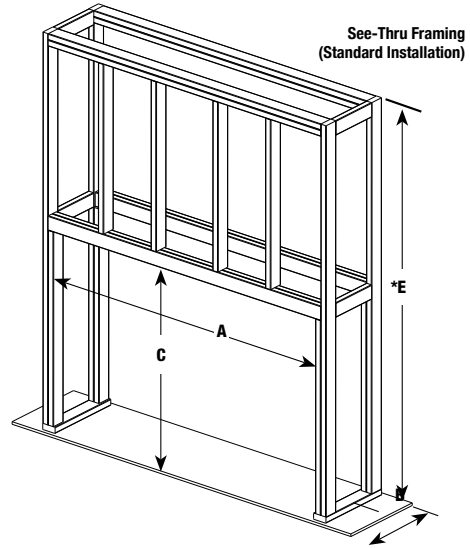

### DRL 4000 ST SERIES FRAMING DIMENSIONS

Models	A	B	C	E	F	G	H
60" See-Thru Framing	74-1/4"	18-1/2"	48-1/2"	84"	—	—	—
60" See-Thru Framing HeatFlo Kit	74-1/4"	18-1/2"	48-1/2"	84"	3"	62"	7-1/2"
72" See-Thru Framing	86-1/4"	18-1/2"	48-1/2"	84"	—	—	—
72" See-Thru Framing HeatFlo Kit	86-1/4"	18-1/2"	48-1/2"	84"	3"	78"	7-1/2"
84" See-Thru Framing	98-1/4"	18-1/2"	48-1/2"	84"	—	—	—
84" See-Thru Framing HeatFlo Kit	98-1/4"	18-1/2"	48-1/2"	84"	3"	90"	7-1/2"

E. Minimum height from appliance base to ceiling  
F. Minimum Opening Distance from Ceiling to Allow for Min Distance from HeatFlo Register to Ceiling of 6"

• REFER TO SPEC SHEET FOR COMPLETE SEE-THROUGH APPLICATIONS AND INSTRUCTIONS.

