
VRE4300 SERIES

OUTDOOR: VENT-FREE GAS FIREPLACE



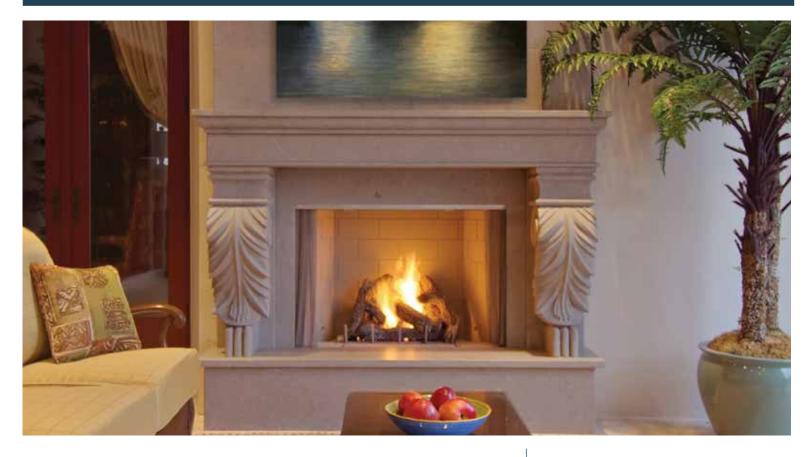

STANDARD FEATURES

- ♠ Available in 36" and 42" radiant smooth-faced models
- Battery operated electronic ignition
- 🕯 Random, dancing yellow flames with realistic lava rock ember bed
- High definition ceramic fiber log set
- White refractory panels in stacked or herringbone patterns
- Heavy duty stainless steel log grate with burner and concealed gas control valve
- Stainless steel screens
- Optional bi-fold glass doors, hood and weather cover
- Stainless steel construction for long lasting outdoor use
- 20 year limited warranty

INTERIOR LINERS (REQUIRED)



White Stacked



White Herringbone

EXTERIOR OPTIONS



Stainless Steel Weather Cover




Bi-Fold Glass Doors and Hood

REMOTE (INCLUDED)




On-Off Hi-Low Remote



	VRE4336	VRE4342
Α	46-1/2"	46-1/2"
В	42-3/4"	48-3/4"
С	20-1/2"	20-1/2"

CORNER FRAMING SPECIFICATIONS




	VRE4336	VRE4342
D	31-3/4"	34-3/4"
E	44-3/16"	49-1/8"
F	42-3/4"	48-3/4"
G	63-1/2"	69-1/2"


IMPORTANT NOTES:


As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.







	VRE4336	VRE4342
Н	23-1/2"	29-1/2"
I	41-3/4"	47-3/4"
J	37"	43"
K	28-1/2"	28-1/2"
L	41-5/16"	41-5/16"
М	20"	20"
N	1-3/4"	1-3/4"
0	4-3/8"	4-3/8"

FIREPLACE BTU OPERATING RANGE			
FUEL	BTU/HR		
NG	39,500-50,000		
LP	37,000-46,000		
NG	39,500-50,000		
LP	37,000-46,000		
	NG LP NG	NG 39,500-50,000 LP 37,000-46,000 NG 39,500-50,000	

On the Cover: VRE3432 shown with White stacked refractory liners



Visit us online SuperiorFireplaces.us.com



