

Prattville™ 210 Wood Stove

Appliance Specifications - Wood-Burning Stoves




Product Reference Information			
Cat. No.	Description	Ship. Weight	Ship. Volume
F5158	S210AGLS Wood Stove, Step Top, Arch Black Door	424 lb.	20.7 cu. ft.

Stove Pipe Diameter Single Wall or Double Wall	6"
Log Length	19" Max.
Firebox	Volume = 2.0 cu. ft.
Maximum Output ❶	76,000 BTUs/hr.
Maximum Burn Times ❶	7–9 hrs.
Heating Capacity ❶	1,200–2,000 sq. ft.

NOTES:

- Dimensions shown are approximations only (+/- 1/4")
- Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.
- Approved for residential, manufactured home, and alcove installations.
- Optional Kits Available:
 - Faceplate Kits (choice of black, nickel or brushed nickel).
 - Thermally Activated Blower Kit (700-CFM)
 - Outside Air Kit
 - Leg Base (choice of black, nickel or brushed nickel)
 - Pedestal Base (choice of standard or with ash drawer)
 - Heat Shield (required with leg base)

❶ Square-foot heating capacities and burn times are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

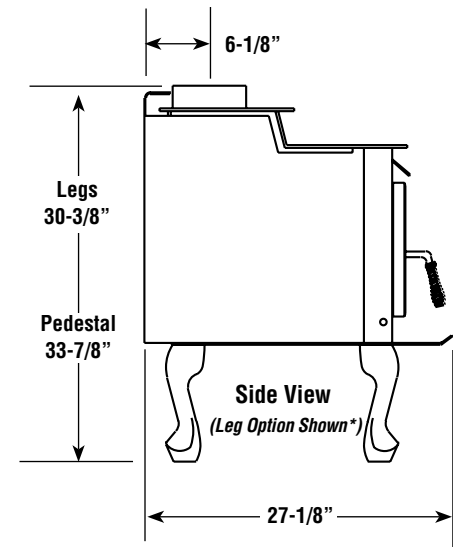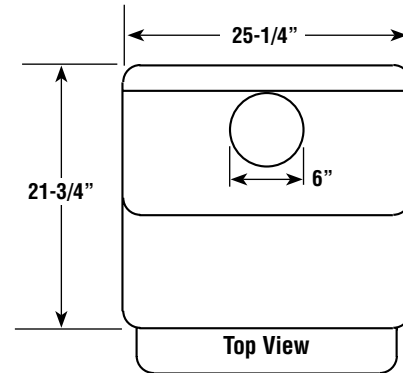

The Prattville™ Model S210AGLS wood stove is safety listed with the following agency:

- Listing Agency: PFS TECO. Listed to UL 1482-2022, CAN/ULC-S627:2023



Report No. 14-185

Certified to comply with EPA 2020 particulate emission standards using crib wood.
Emissions value: 1.5 g/hr

Prattville™ 210 Wood Stove

Clearances - Refer to Diagrams A, B & C

PIPE	INSTALLATION	A	B (1)	C	D (1)	E†	F (1,4)
Single Wall	Residential	16"	13-3/4"	24"	14-1/2"	8"	9"
② Single w/ Pipe Shield	Residential	10"	7-3/4"	24"	14-1/2"	8"	9"
Double Wall	Residential or Mobile Home*	10"	7-3/4"	18"	8-1/2"	8"	6"
Double Wall	Alcove	10"	7-3/4"	21"	8-1/2"	8"	6"

PIPE	INSTALLATION	G (4)	H (2)	J (2)	K	L	M
Single Wall	Residential or Alcove	18"	37-3/4"	34-3/4"	16"	0"	84"
② Single w/ Pipe Shield	Residential or Alcove	18"	37-3/4"	34-3/4"	16"	0"	84"
Double Wall Air-Cooled	Residential or Alcove or Mobile Home	15"	37-3/4"	34-3/4"	16"	0"	72"
Double Wall	Alcove	N/A	37-3/4"	34-3/4"	16"	0"	72"

† 8" from door opening

① Dimensions to Stove Body

② Clearances may only be reduced by means approved by the regulatory authority.

Diagram A: Top View-Parallel Installation

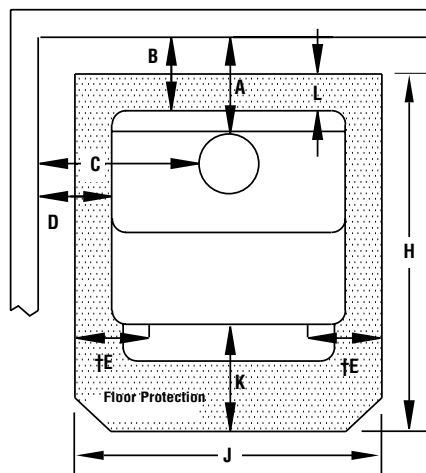


Diagram B: Side View-Alcove Installation

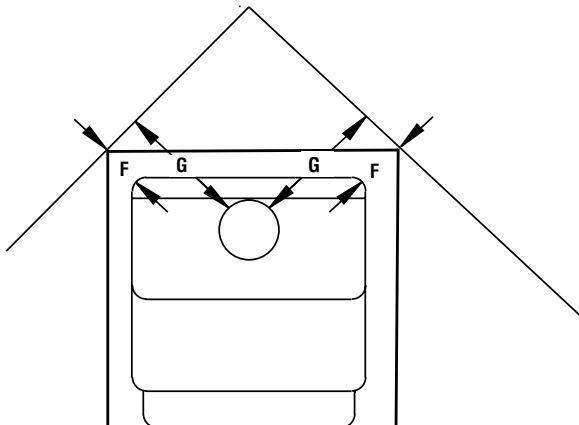
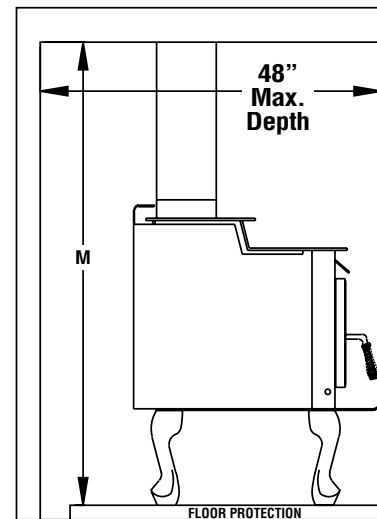


Diagram C: Top View-Corner Installation

Footnotes:

- 1- These dimensions to the stove body are for reference only. Actual distances should be measured from the stove's flue collar.
- 2- Minimum noncombustible hearth pad dimensions.
- 3- Shield shall be attached to the rear of the stove pipe with a 1" air space and must run from the top of the stove to the ceiling.
- 4- Not applicable to alcove installations.

Clearances to connector pipe shall be measured from the flue collar of the stove.