


WCT6920WSS

EPA Wood Burning Fireplaces Specifications

Framing Dimensions

PRODUCT REFERENCE INFORMATION	
Model: WCT6920WSS, Cat. No. F5118	
Weight	330 lbs
Height	38"
Width	37-1/4"
Depth	25-1/8"
Firebox W x H x D measured in front	22" x 11-3/4" x 12"

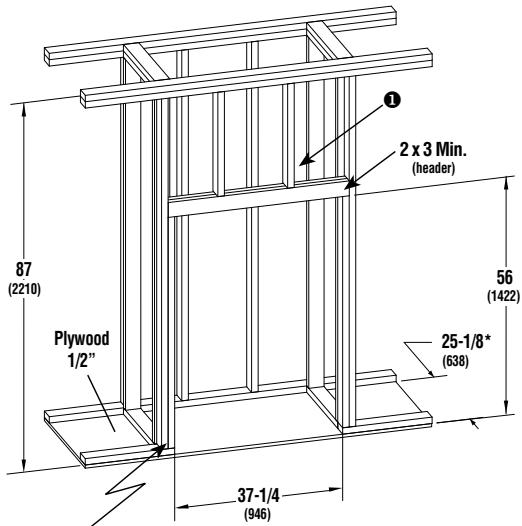

Rough Framing Face
(dimension includes finish material inside framing, if any)

* For flush framing installations


● Combustible materials can NOT be used in the space directly above the fireplace. Do not fill the space above the fireplace with any material (Except the wood framing)




Report No. 14-199

Listed to ULC-S610 & UL-127

EPA certification test emission value 1.5 g/hr Per NYSERDA IDC ATM dated May 21, 2025

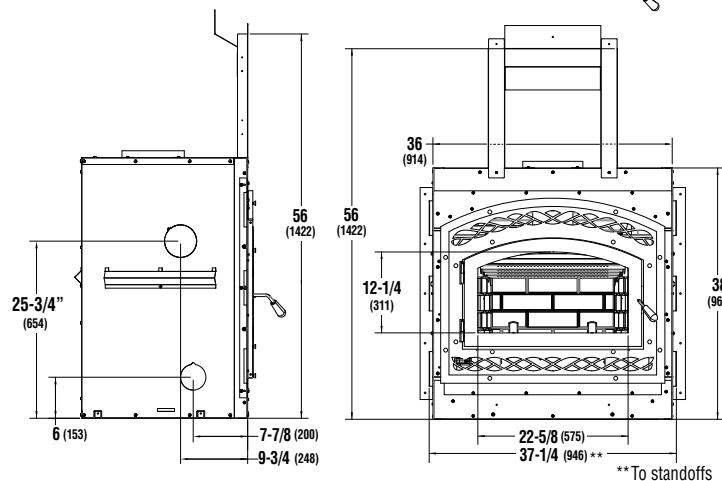


**To standoffs

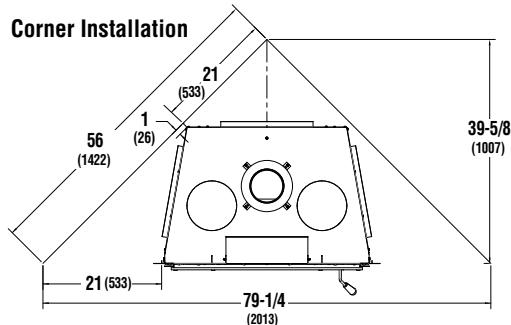


Back Wall of Chase / Enclosure
Including Finishing Materials, if any

Outside Chase

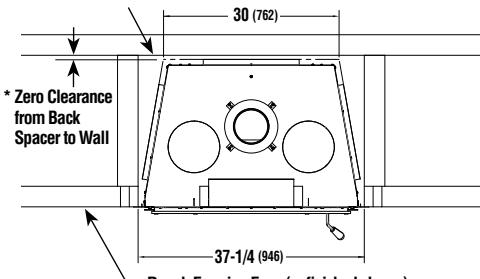

* Zero Clearance from Back Spacer to Wall

Rough Framing Face (unfinished shown)

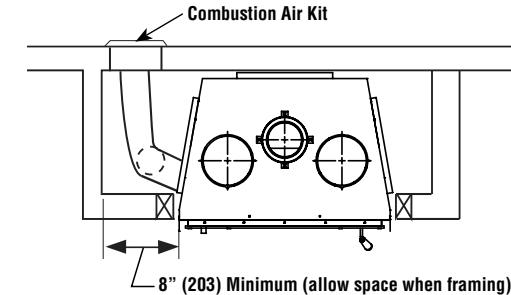

8" (203) Minimum (allow space when framing)

NOTES

Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

All framing dimensions include sheathing.

* The fireplace must not be in contact with any insulation or loose filling material. Cover the insulation with drywall panels around the fireplace.

Listing Information

Fireplace Dimensions

INSTALLATION ACCESSORIES

- 6" diameter chimney - United States Model IHP Snap-Pak, including:
 - Chimney lengths
 - Elbows (where necessary)
 - Associated components as per these installation instructions
- 6" diameter chimney - Canada * Security Chimney: Secure Temp ASHT+ or S2100+, DuraVent: DuraTech Canada or Duratech Premium, including:
 - Chimney lengths
 - Elbows (where necessary)
 - Associated components as per the installation instructions & instructions provided by the venting manufacturer
- Decorative Door - Required (Order Separately)
- Front Facade kit - Required (Order Separately)
- UZY6-B Blower Kit (included)
- VRUW Blower Speed Control (included)
- Outside Air Kit (Included)
- Heatlift Convection Kit (optional)
- Forced Air Kit (optional)
- Finishing Guide Plate (included on Fireplace)


*Available from Security Chimneys™

Inches (millimeters)

Page 1 of 2

WCT6920WSS

Typical Installations

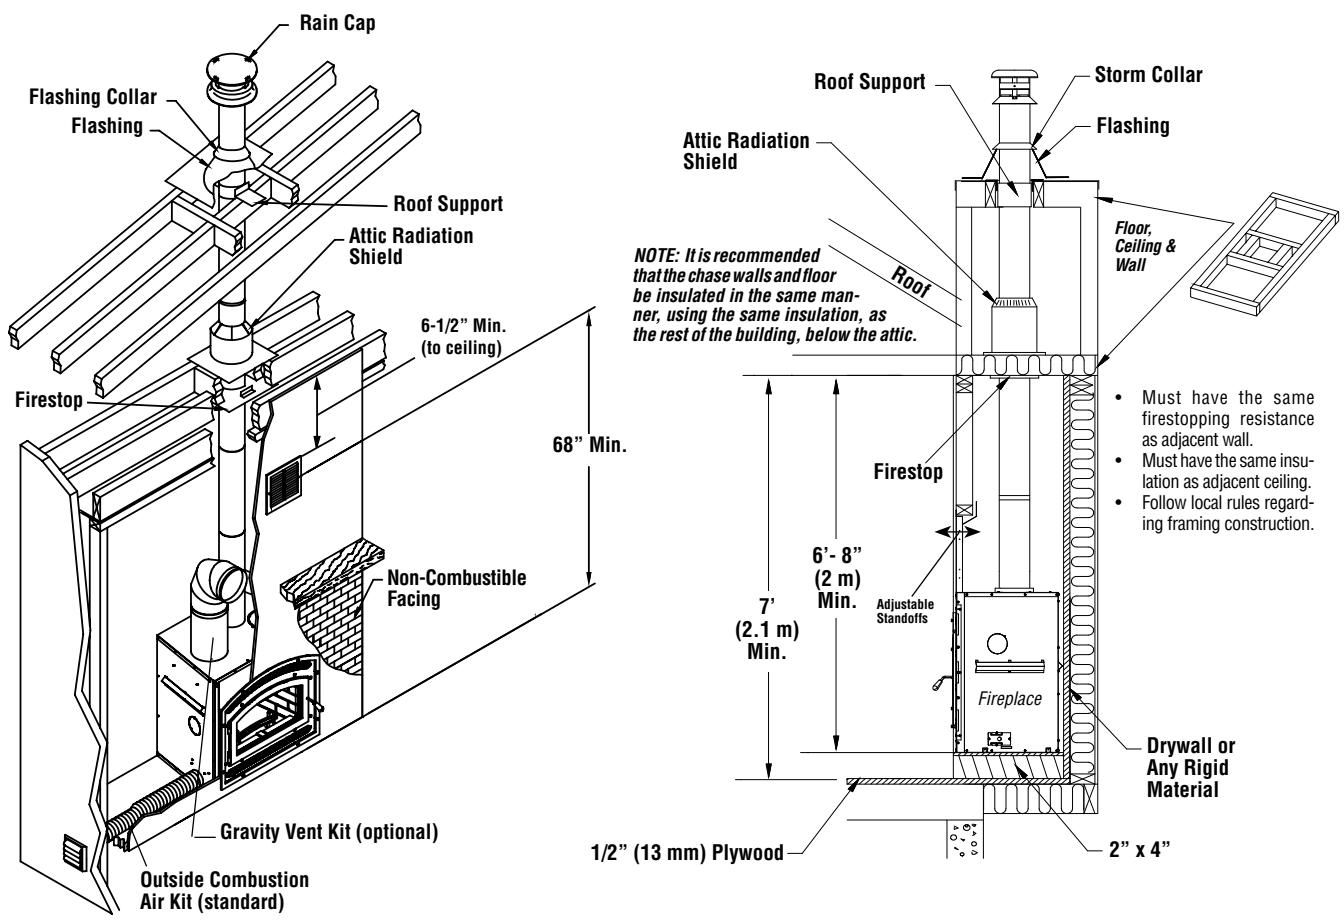

Combustible Clearances

The following clearances meet the minimum requirements for a safe installation:

Side wall: 24" (610 mm) measured from the firebox opening.

Ceiling: 6'-8" (2032 mm) measured from the base of the fireplace.

Fireplace enclosure:

Bottom: 0"
Side: 0" to spacer
Back: 0" to spacer

Top: Do not fill the space above the fireplace with any material (Except the wood framing)

Chimney: 2" (51 mm)

Mantel: 39-1/2" (1,004mm) minimum above base of unit.
16" (407mm) maximum depth.

NOTE: Only non-combustible mantels may be used.

