



VRT4032 SERIES

VENT-FREE UNIVERSAL FIREBOX

Framing Dimensions





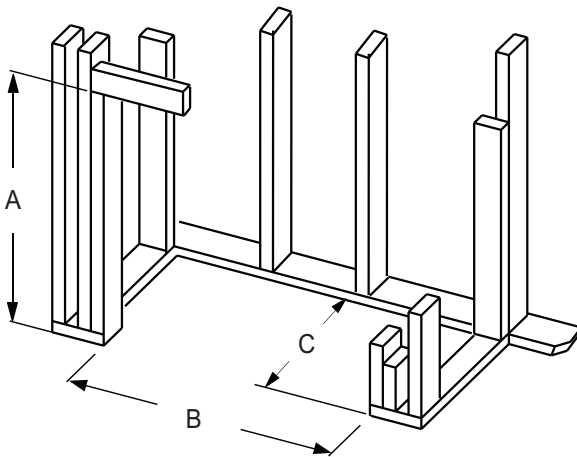


Models	A	B	C
32" Models	36-3/4" 935 mm	35" 889 mm	16-1/4" 413 mm

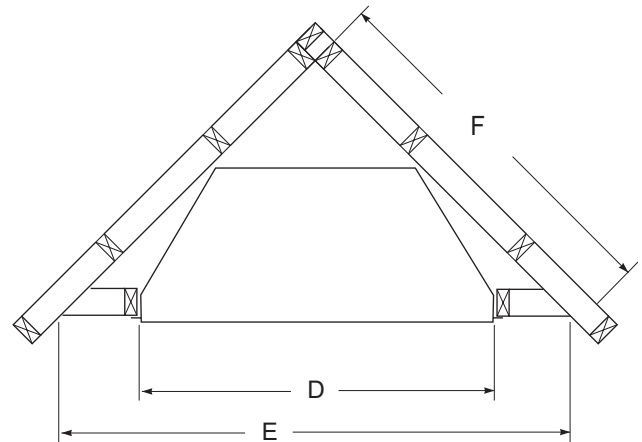

Models	D	E	F
32" Models	35-7/8" 912 mm	60" 1524 mm	42-1/2" 1080 mm

Fireplace Dimensions

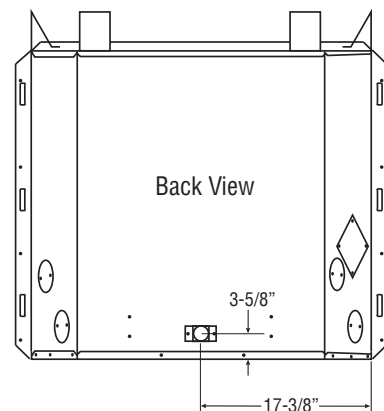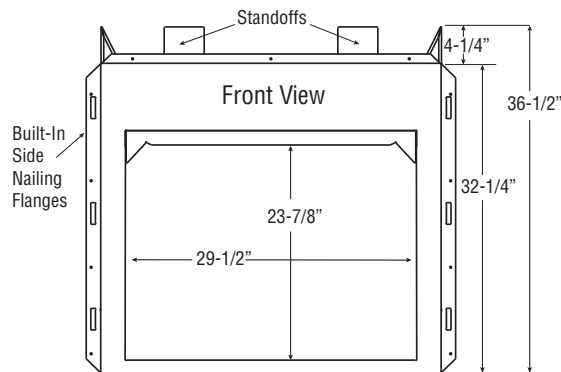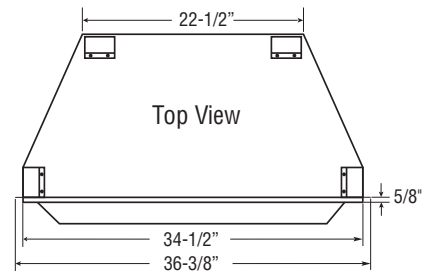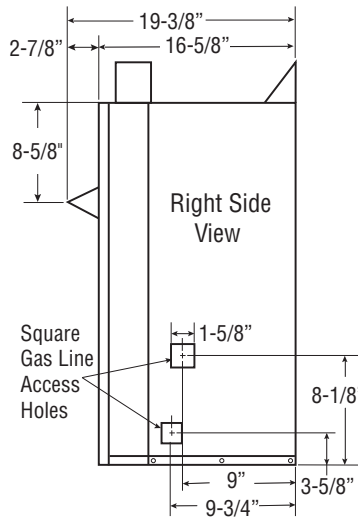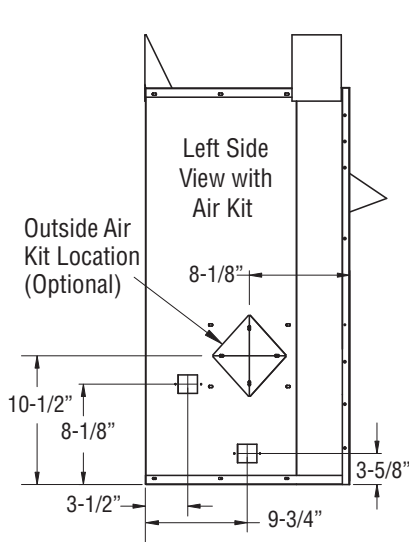

VRT4032 SERIES

Product Information

Cat. No.	Model	Interior	Weight	Cu. Ft.
F0286	VRT4032WS	White Stacked Brick	104 lb.	14.0
F0287	VRT4032WH	White Herringbone	104 lb.	14.0
F0292	VRT4032RS	Red Stacked Brick	104 lb.	14.0
F0293	VRT4032RH	Red Herringbone	104 lb.	14.0


Listing Information



Report No. F09-130


These appliances comply with National Safety Standards and are listed by PFS Corporation to ANSI Z21.91 Ventless Firebox Enclosures for Gas-Fired Unvented Decorative Room Heaters and is approved for use with appliances listed to ANSI Z21.11.2 decorative type unvented room heaters.

Clearances

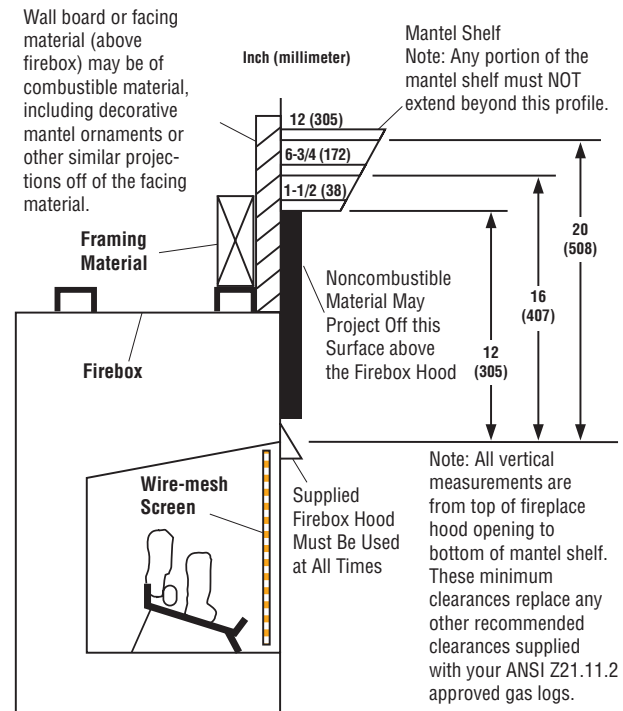


Minimum Wall and Ceiling Clearances (see figure below)

- Clearances from the side of the fireplace cabinet to any combustible material and wall should follow diagram shown here.
Example: The face of a mantel, bookshelf, etc. is made of combustible material and protrudes 3-1/2" from the wall. This combustible material must be 4" from the side of the fireplace cabinet.
- Clearances from the top of the firebox opening to the ceiling should not be less than 42".
- When the firebox is installed directly on carpeting, vinyl tile or other combustible material, other than wood flooring, the firebox should be installed on a metal or wood panel extending the full width and depth of the enclosure.
- Clearances from the bottom of firebox to the floor is 0".

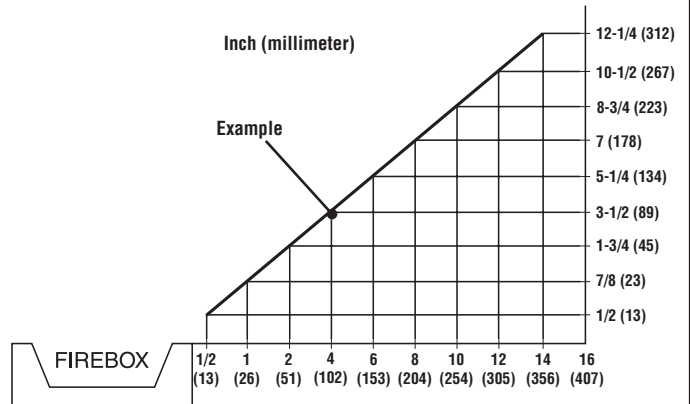

Nailing Flanges

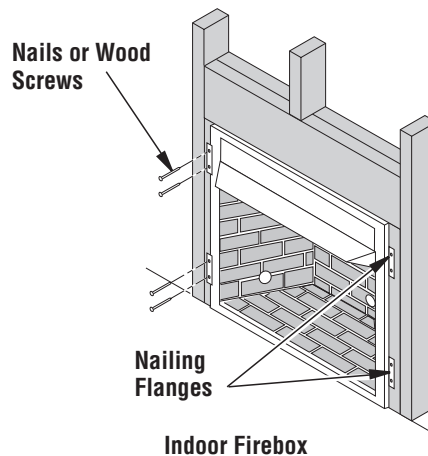

NOTE: DIAGRAMS & ILLUSTRATIONS ARE NOT TO SCALE.

Printed in U.S.A. © 2016 Innovative Hearth Products
P/N 900722-00 REV. A 06/2017

Specifications and clearances are subject to change without notice. Refer to Installation Manual before installation of these appliances for updated dimensions and instructions.

Page 2 of 2

