

# Sumter™ 2100 Wood Stove

## Appliance Specifications - Wood-Burning Stove

| Product Reference Information |                                |                 |                 |
|-------------------------------|--------------------------------|-----------------|-----------------|
| Cat. No.                      | Description                    | Shipping Weight | Shipping Volume |
| F5031                         | Sumter 2100 Wood-Burning Stove | 310 lb.         | 23 cu. ft.      |

### NOTES:

- Dimensions shown are approximations only (+/- 1/4")
- Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.
- Approved for residential and manufactured home installations.
- Optional Kits Available: Blower and Outside Air Kit

- ① Square-foot heating capacities and burn times are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.


The Sumter 2100 woodstove is safety listed with the following agency:

- PFS TECO, Tested to UL 1482-2022, CAN/ULC-S627:2023



Report No. 14-193


Certified to comply with EPA 2020 particulate emission standards using crib wood.  
Emissions value: 1.5 g/hr

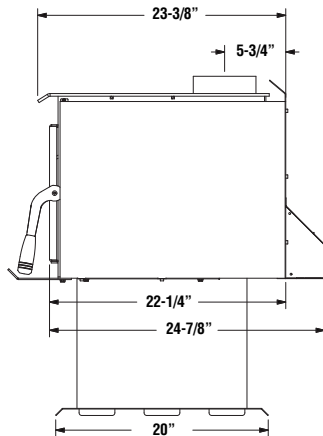


RIGHT SIDE VIEW

### Specifications

|                                                   |                        |
|---------------------------------------------------|------------------------|
| Stove Pipe Diameter<br>Single Wall or Double Wall | 6"                     |
| Log Length                                        | 19" Max.               |
| Firebox                                           | Volume = 2.0 cu. ft.   |
| Cord Wood: ①                                      | 76,000 BTUs/hr.        |
| Maximum Burn Times ①                              | 7-9 hours              |
| Heating Capacity ①                                | 1,200 to 2,000 sq. ft. |

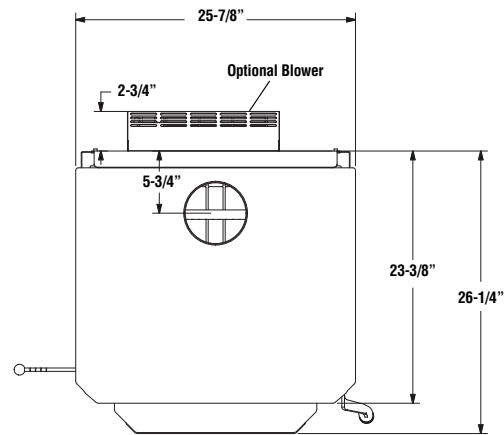

TOP VIEW



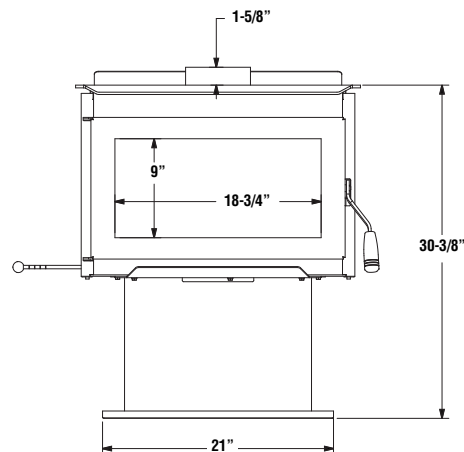


FRONT VIEW

### Dimensions

# Sumter™ 2100 Wood Stove

## Clearances

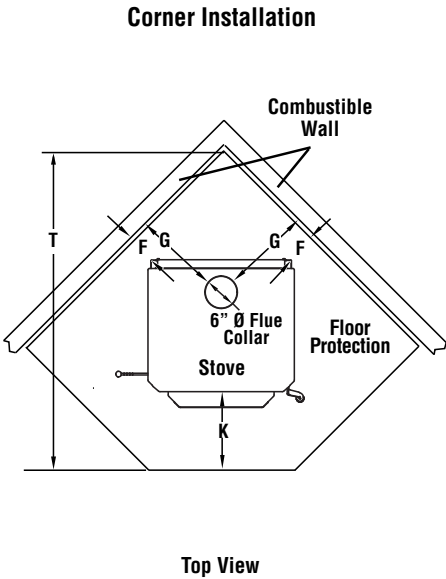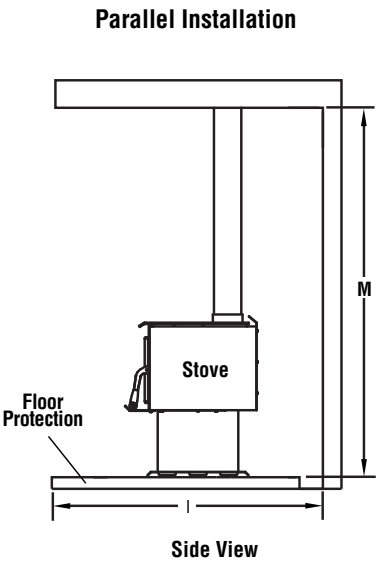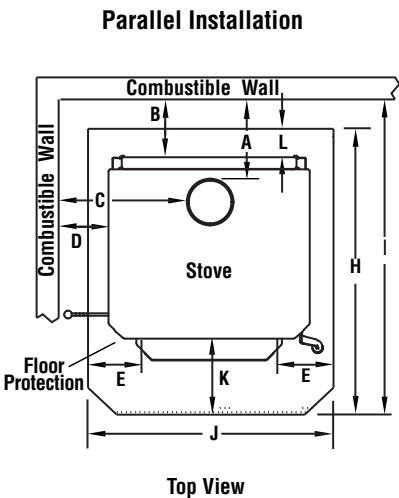

### USA - inches

| PIPE        | INSTALLATION               | A (3)  | B (1)  | C (3)  | D (1)  | E (8) | F (1) | G (3) | H (2)  | I (6)  | J (2)  | K (7) | L (5) | M  | T (6)  |
|-------------|----------------------------|--------|--------|--------|--------|-------|-------|-------|--------|--------|--------|-------|-------|----|--------|
| Single Wall | Residential                | 14-1/4 | 11-1/2 | 23     | 13-3/8 | 8     | 9     | 18    | 37-5/8 | 49     | 34-7/8 | 16    | 0     | 84 | 61-1/2 |
| Double Wall | Residential or Mobile Home | 12     | 9-1/8  | 19-1/2 | 9-5/8  | 8     | 6     | 15    | 37-5/8 | 46-3/4 | 34-7/8 | 16    | 0     | 84 | 57-1/2 |

### Footnotes:

- 1- These dimensions to the stove body are for reference only. Actual distances should be measured from the stove's flue collar.
- 2- Minimum noncombustible hearth pad dimensions.
- 3- Clearances to connector pipe shall be measured from the flue collar of the stove.
- 6- Reference dimension only, to assist in planning the installation.
- 7- Measured from front of floor protection to the front of firebox.
- 8- 8" from door opening.